


# Quarter Window Replacement (Long Body C/100)


## Removal Procedure

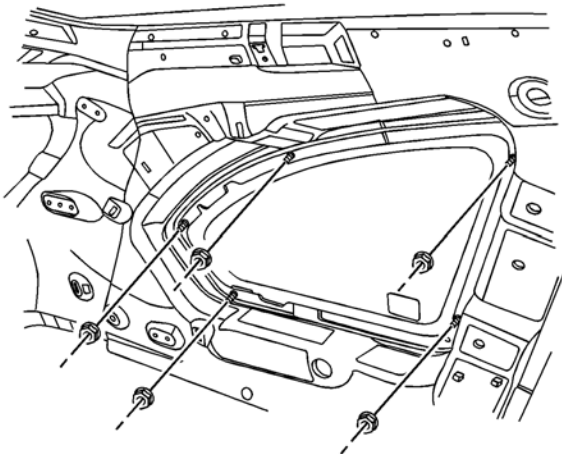

1. Remove the quarter window garnish molding. Refer to [Body Side Window Rear Garnish Molding Replacement](#) .
2. Remove the nuts and the outer window.

## Installation Procedure

**Notice:** Refer to [Fastener Notice](#) in the Preface section.

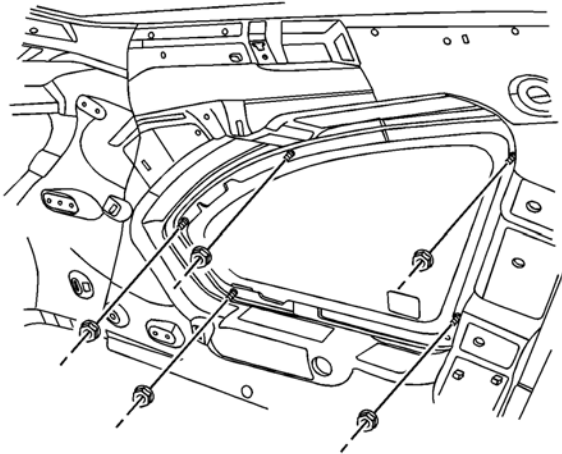

1. Install the outer window with the nuts.

**Tighten**  
Tighten the outer window nuts to 6 N·m (53 lb in).

2. Install the quarter window garnish molding. Refer to [Body Side Window Rear Garnish Molding Replacement](#) .