


Tighten the front seatback bolts to 45 N·m (33 lb ft).

3. Connect the electrical connectors.

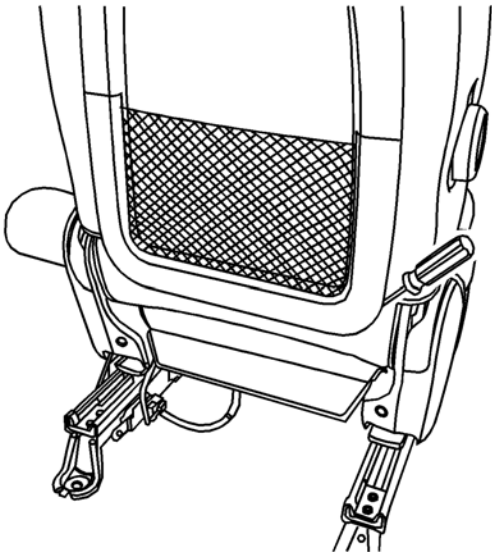

4. Install the seat trims to its original position.
5. Install the back panel onto the seat.
6. Install the front seat in the vehicle. Refer to [Bucket Seat Replacement](#) .