


Front Fender Replacement (C 100/Long Body)


Removal Procedure



1. Remove the two fender liner screws.

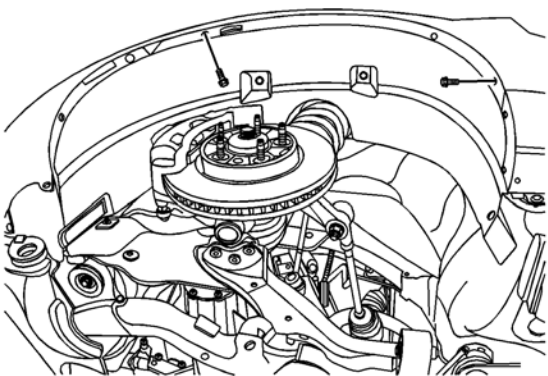

2. Remove the screw (1) securing the front fascia to the fender.

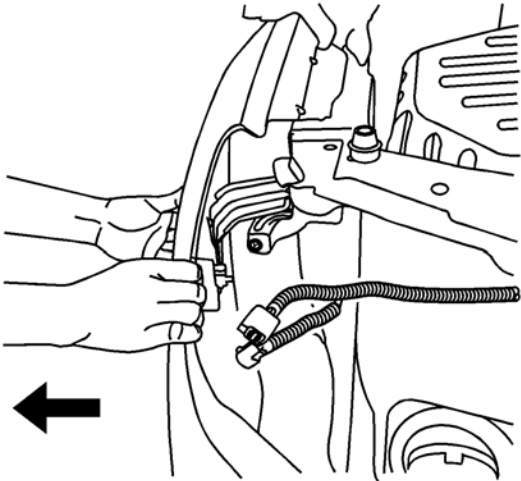

3. Reposition the front fascia from the fender by pulling the side of the front fascia outward.