


Rear Side Door Trim Replacement (Sedan)

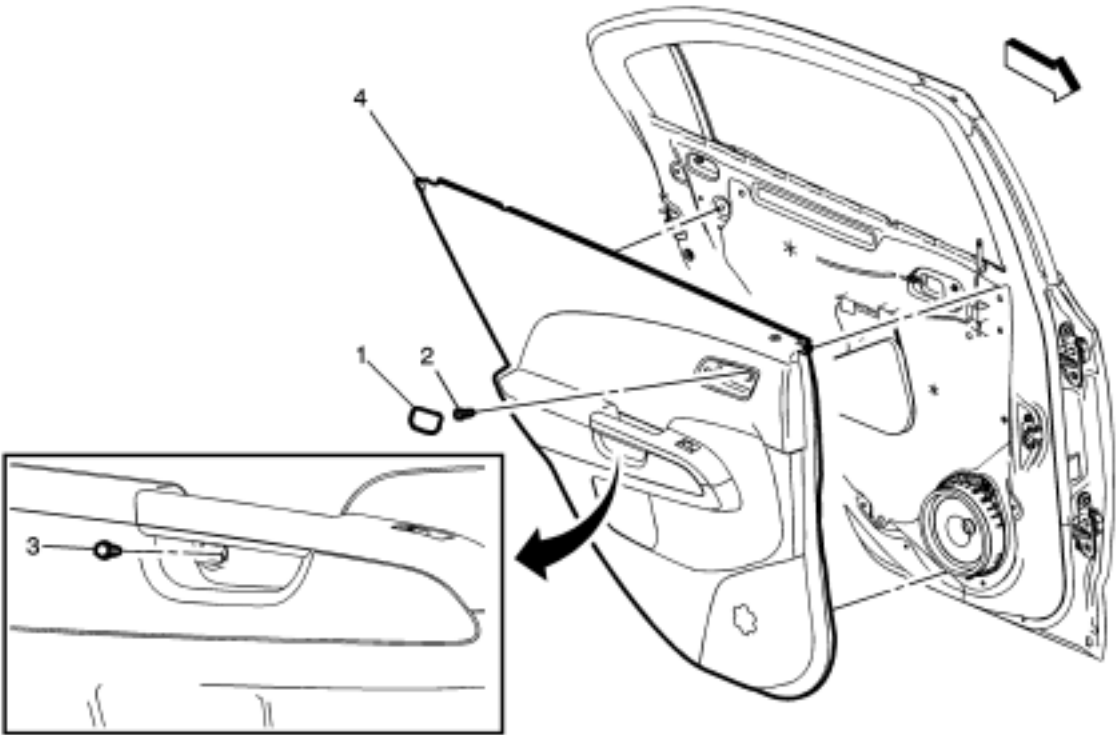

| Callout | Component Name |
|---------|--|
| 1 | Rear Side Door Inside Handle Bolt Cap |
| 2 | <div>Rear Side Door Inside Handle Fastener</div> <div>Caution: Refer to Fastener Caution .</div> <div>Procedure</div> <div>Pull handle back to remove cap. Use suitable tool to unsnap.</div> |
| 3 | <div>Rear Side Door Trim Fastener</div> <div>Procedure</div> <div>Use a small flat-bladed tool to open the rear side door trim integral cap to access the fastener.</div> |
| 4 | <div>Rear Side Door Trim Assembly</div> <div>Procedure</div> <div><div>1. Use the appropriate plastic trim tool to aid in the removal of the door trim.</div><div>2. Pull upwards on the door lock retainer cable to disengage.</div><div>3. Disconnect the electrical connector.</div></div> |