


Rear Side Door Outside Handle Rod Replacement (Sedan)

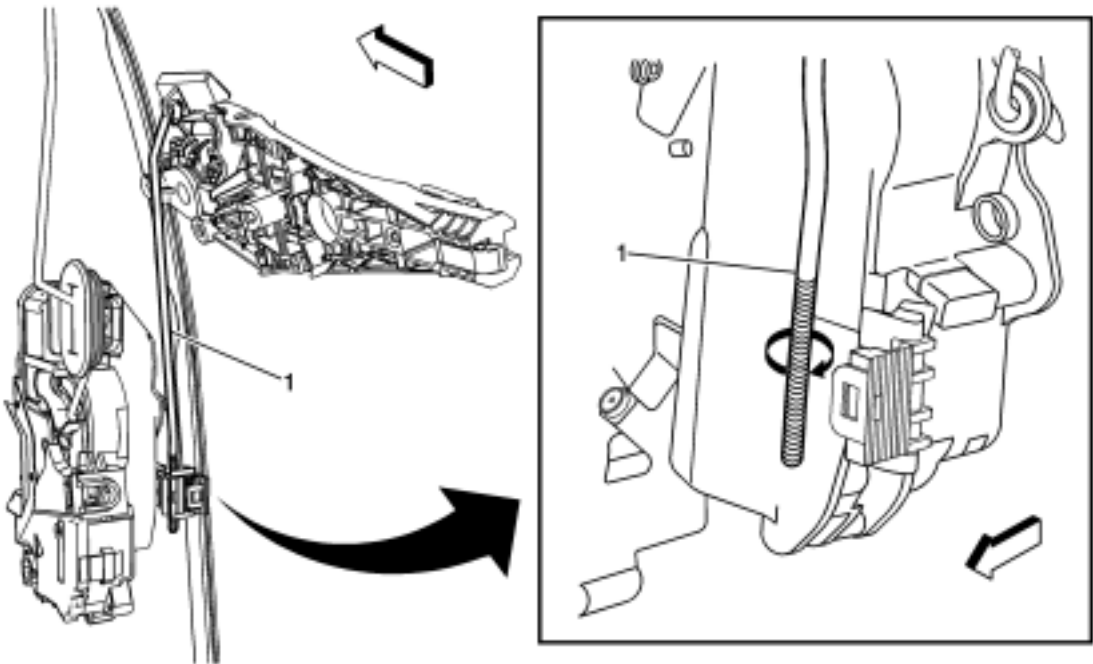

Callout	Component Name
<p>Preliminary Procedures</p> <p>Remove the rear side door trim panel. Refer to Rear Side Door Trim Replacement .</p>	
1	<p>Rear Side Door Outside Handle Rod</p> <p>Procedures</p> <ol style="list-style-type: none">1. Remove the rear side door water deflector.2. Open the handle rod clip.3. Inspect the door locking system for proper operation before installing the trim panel. Refer to Rear Side Door Outside Handle Rod Adjustment .