


Front Air Deflector Replacement

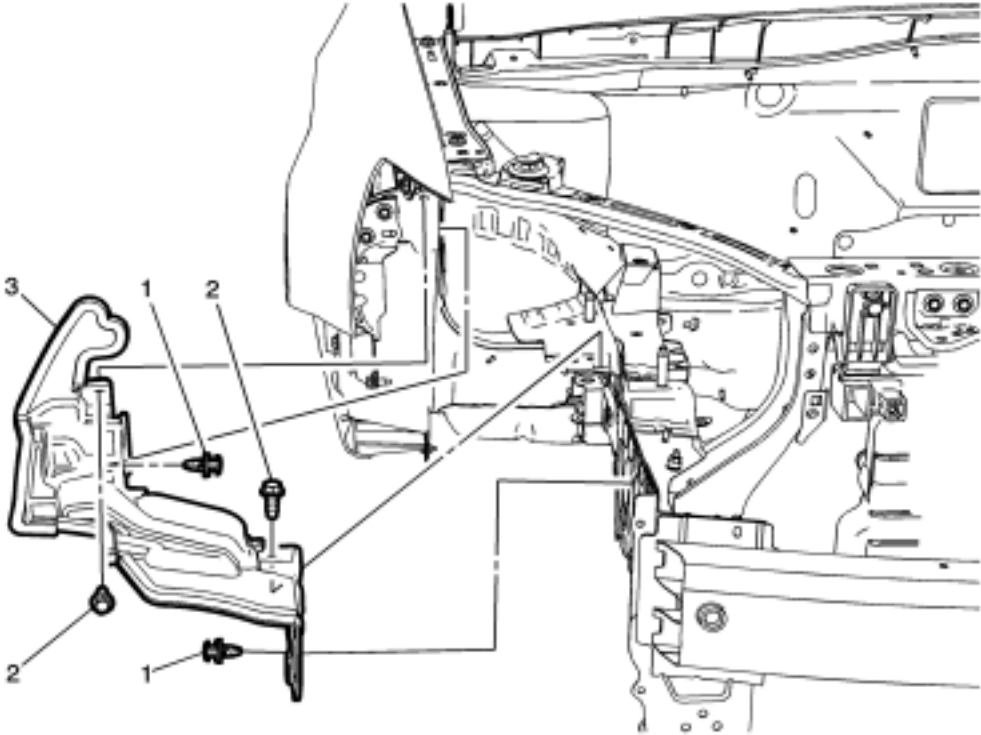

Callout	Component Name
<p>Preliminary Procedure</p> <p>1. Remove front bumper fascia. Refer to Front Bumper Fascia Replacement</p> <p>2. Remove the headlamp. Refer to Headlamp Replacement .</p>	
1	Front Air Deflector Retainers (Qty:2)
2	Front Air Deflector Bolts (Qty:2) Caution: Refer to Fastener Caution . Tighten 8N·m (71lbin)
3	Front Air Deflector