


Rear Side Door Trim Replacement (Hatchback)

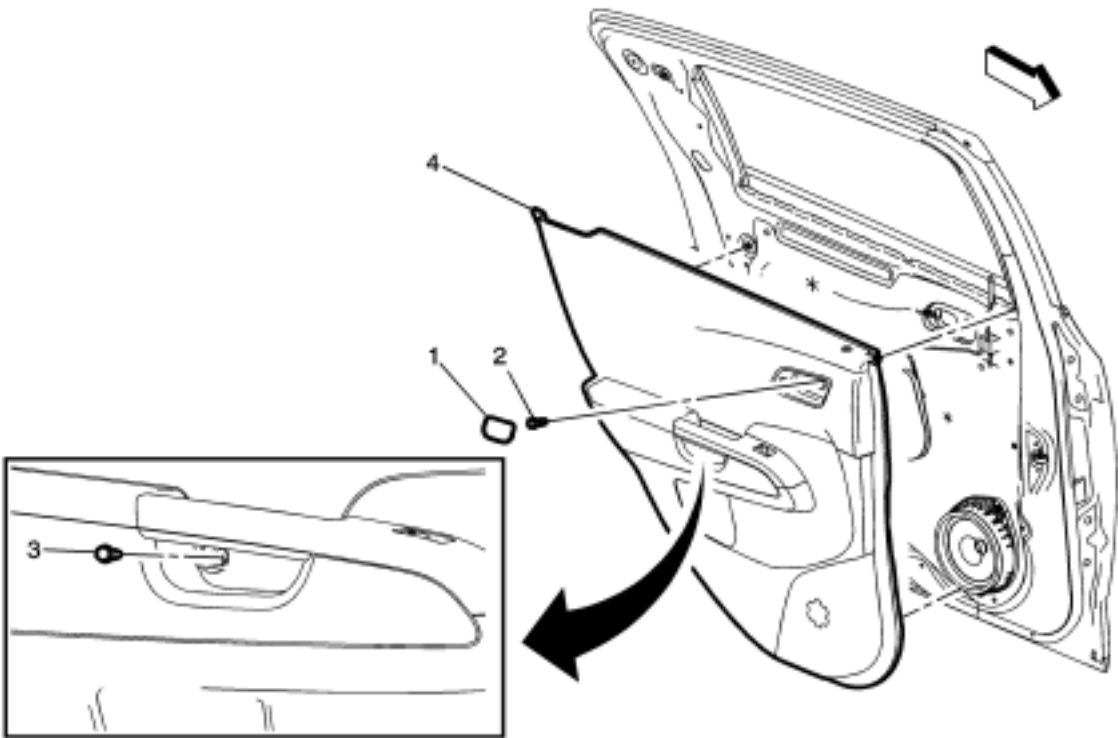

Callout	Component Name
Preliminary Procedure Remove the rear side door upper rear trim panel. Refer to Rear Side Door Upper Rear Trim Panel Replacement .	
1	Rear Side Door Inside Handle Bolt Cap
2	<div>Rear Side Door Inside Handle Fastener</div> <div>Caution: Refer to Fastener Caution .</div> <div>Procedure Pull handle back to remove cap. Use suitable tool to unsnap.</div>
3	<div>Rear Side Door Trim Fastener</div> <div>Procedure Use a small flat-bladed tool to open the rear side door trim integral cap to access the fastener.</div>
4	<div>Rear Side Door Trim Assembly</div> <div>Procedure <div>1. Use the appropriate plastic trim tool to aid in the removal of the door trim. 2. Pull upwards on the door lock retainer cable to disengage. 3. Disconnect the electrical connector.</div></div>