


Roof Panel Joint Finish Molding Replacement

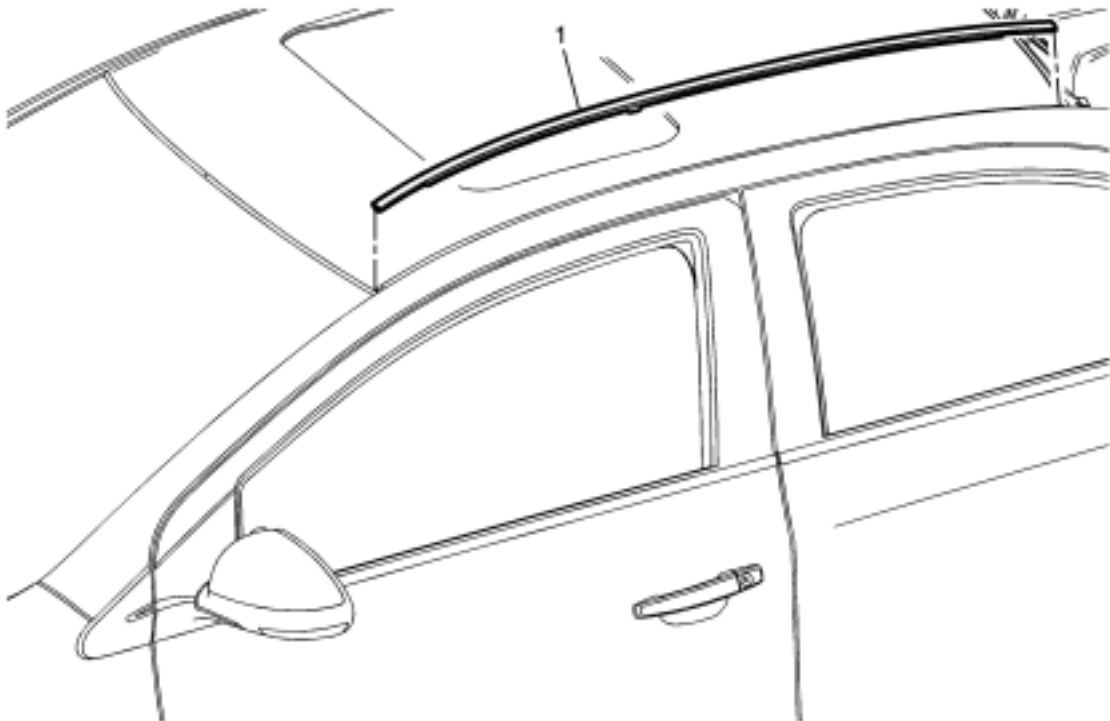

Callout	Component Name
<p><b>Caution:</b> Refer to <a href="#">Exterior Trim Emblem Removal Caution</a> .</p> <p><b>Preliminary Procedures</b></p> <ol style="list-style-type: none"><li>1. Begin at the rear edge of the roof panel joint finish molding and carefully pry the molding from the roof ditch clip.</li><li>2. Pull the molding forward out of the ditch.</li><li>3. Carefully lift the front edge from the second roof ditch clip.</li><li>4. Clean any adhesive residue from the ditch using a 50/50 mixture by volume of isoproypl alcohol and clean drinkable water.</li><li>5. Dry the ditch with a lint free cotton towel.</li></ol>	
1	<p>Roof Panel Joint Finish Molding</p> <p><b>Procedure</b></p> <ol style="list-style-type: none"><li>1. Insert the front edge of the finish molding to the edge of glass.</li><li>2. Using a roller-type tool, roll the molding into the ditch front to rear to ensure full adhesion is made.</li><li>3. Tuck the rear lip of the finish molding to the edge of glass at the rear of the roof panel.</li><li>4. Inspect the molding to roof ditch fit.</li></ol>