


High Mount Stop Lamp Replacement (Hatchback)

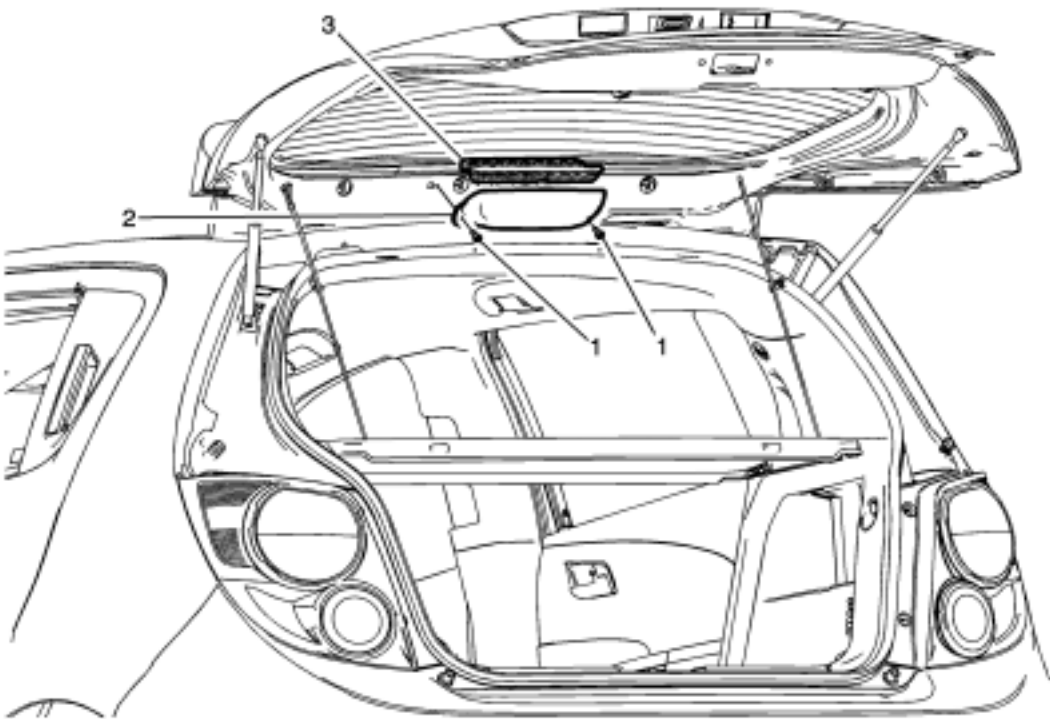

Callout	Component Name
Preliminary Procedure Open and support the liftgate assembly.	
1	High Mount Stop Lamp Bolt (Qty: 2) Caution: Refer to Fastener Caution . Tighten 2.5 N·m (22 lbin)
2	High Mount Stop Lamp Cover Procedure Remove the cover and the four screws from the high mount stop lamp.
3	High Mount Stop Lamp Assembly Procedure Release the electrical connector and (LED) Light Emitted Diode lamp from the cover.