


Front Side Door Window Rear Guide Replacement

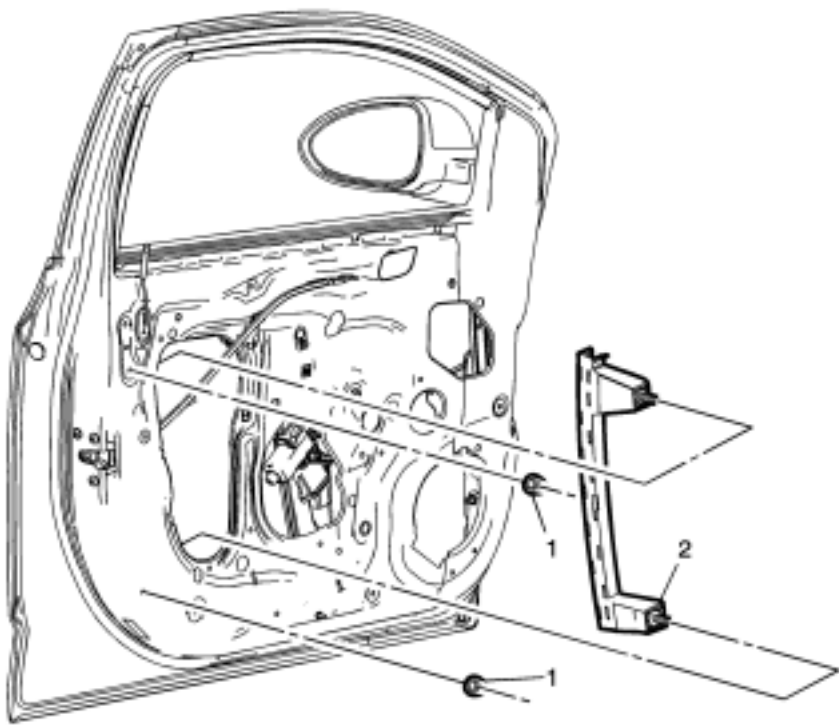

Callout	Component Name
<p>Preliminary Procedure</p> <p>Remove the front side door trim panel. Refer to Front Side Door Trim Replacement .</p>	
1	<p>Front Side Door Window Rear Guide Nut (Qty:2)</p> <p>Caution: Refer to Fastener Caution .</p> <p>Procedure</p> <p>1. Remove the front side door water deflector. 2. Do not remove the window from the vehicle, raise the window to the fully up position. 3. Pull the weatherstrip out from the inner channel of the guide.</p> <p>Tighten 11 N·m (97lbin)</p>
2	<p>Front Side Door Window Rear Guide</p> <p>Tip Inspect the window for proper operation before installing the trim panel.</p>