


Rear Side Door Locking Rod Bellcrank Replacement

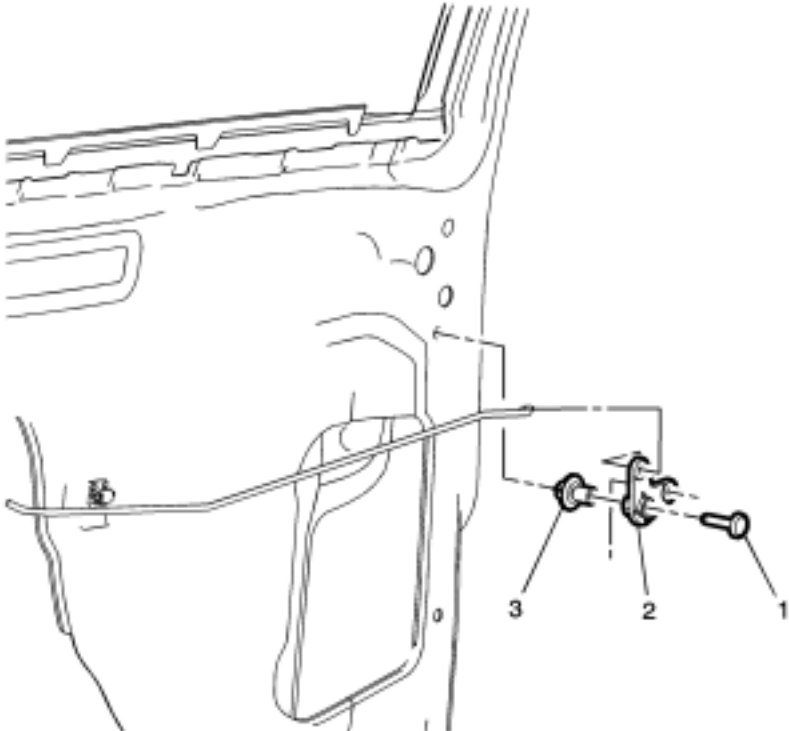

Callout	Component Name
<p>Preliminary Procedures</p> <p>Remove the rear side door trim panel. Refer to Rear Side Door Trim Replacement .</p>	
1	<p>Rear Side Door Lock Rod Bellcrank Center Retainer</p> <p>Procedure</p> <p>1. Place the window in the full up position. 2. Remove the water deflector.</p> <p>Note: Use a small flat-bladed tool to release the retainer from the center of the bellcrank.</p>
2	<p>Rear Side Door Lock Rod Bellcrank Center</p>
3	<p>Rear Side Door Lock Rod Bellcrank Retainer to Door</p> <p>Note: Inspect the door lock system for proper operation before installing the door trim panel.</p>