


Rear Side Door Window Rear Guide Replacement

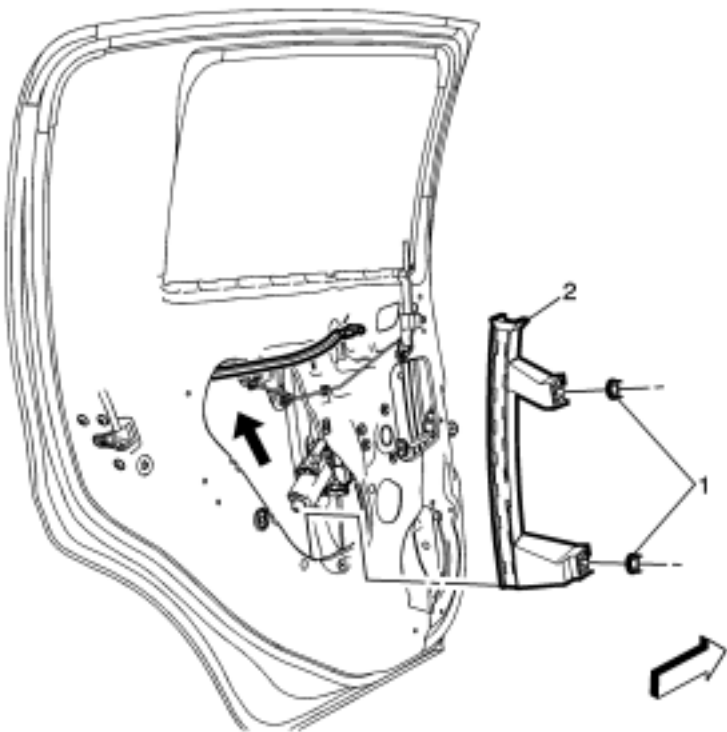

Callout	Component Name
<p><b>Preliminary Procedure</b></p> <p>Remove the rear side door trim panel. Refer to <a href="#">Rear Side Door Trim Replacement</a> .</p>	
1	<p>Rear Side Door Window Rear Guide Nut (Qty: 3)</p> <p><b>Caution:</b> Refer to <a href="#">Fastener Caution</a> .</p> <p><b>Procedure</b></p> <p>1. Remove the rear side door water deflector. 2. Do Not remove the window from the vehicle, raise the window to the fully up position. 3. Pull the weatherstrip out from the inner channel of the guide.</p> <p><b>Tighten</b> 11 N·m (97 lbin)</p>
2	<p>Rear Side Door Window Rear Guide</p> <p><b>Tip</b> Inspect the door window for proper operation before installing the door trim panel.</p>