


Front Side Door Check Link Replacement

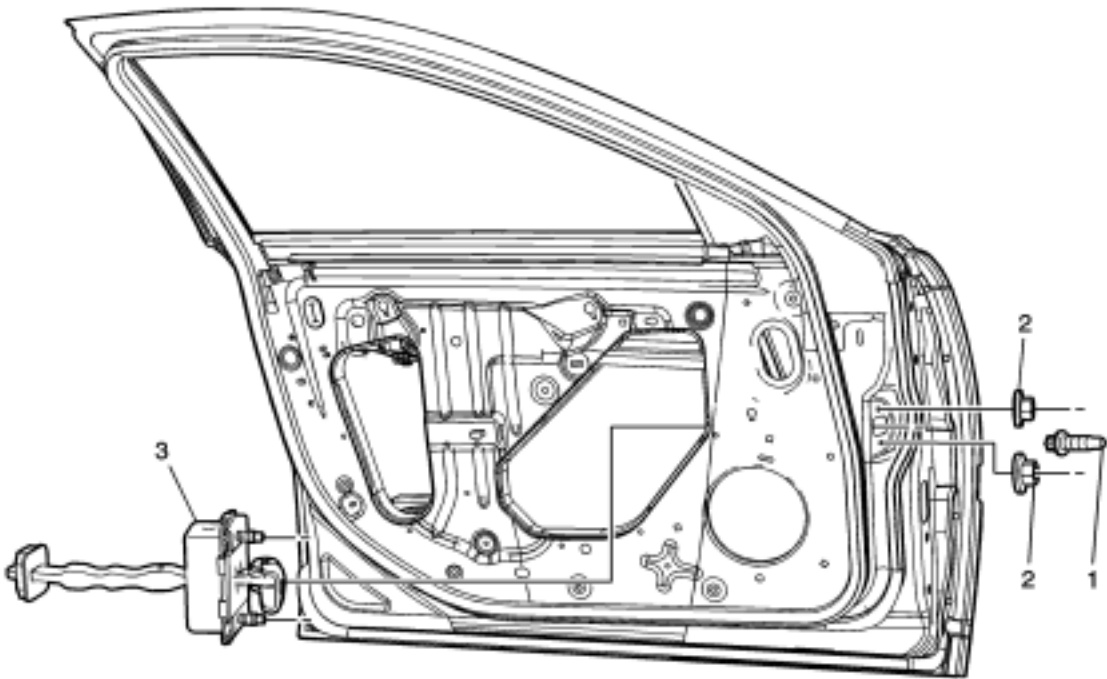

Callout	Component Name
<p>Preliminary Procedure</p> <p>Remove the front side door trim panel. Refer to Front Side Door Trim Replacement .</p>	
1	<p>Front Side Door Check Link Bolt to Body</p> <p>Caution: Refer to Fastener Caution .</p> <p>Note: Place the door window in the full open position.</p> <p>Tighten 22N·m (16lbft)</p>
2	<p>Front Side Door Check Link Nut (Qty: 2)</p> <p>Procedure</p> <p>Remove the water deflector.</p> <p>Tighten 9N·m (80lbin)</p>
3	<p>Front Side Door Check Link</p>