


Front Wheelhouse Liner Replacement (Front)

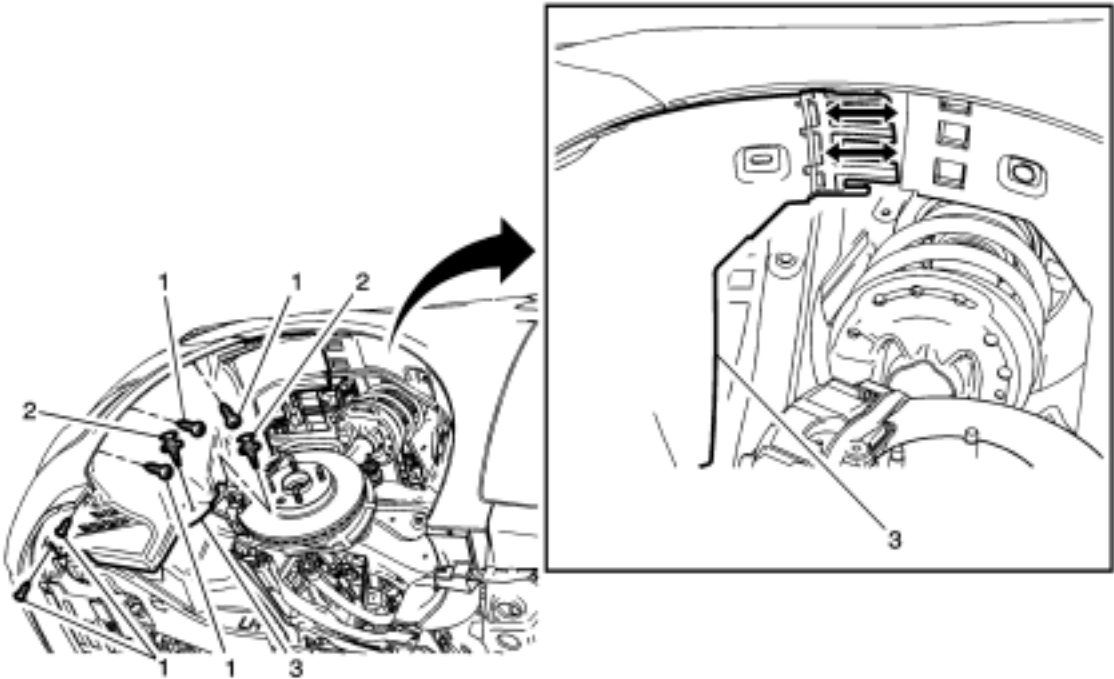

Callout	Component Name
<p><b>Preliminary Procedure</b></p> <p>Remove the tire and wheel assembly. Refer to <a href="#">Tire and Wheel Removal and Installation</a> .</p>	
1	<p>Front Wheelhouse Liner Screw – Front (Qty: 5)</p> <p><b>Caution:</b> Refer to <a href="#">Fastener Caution</a> .</p> <p><b>Tighten</b> 2.5 N·m (22 lb in)</p>
2	<p>Front Wheelhouse Liner Push-In Retainer – Front (Qty: 2)</p>
3	<p>Front Wheelhouse Liner – Front</p> <p><b>Procedure</b></p> <p>Disengage the upper interlocking retainers.</p>