


Tail Lamp Replacement (Sedan)

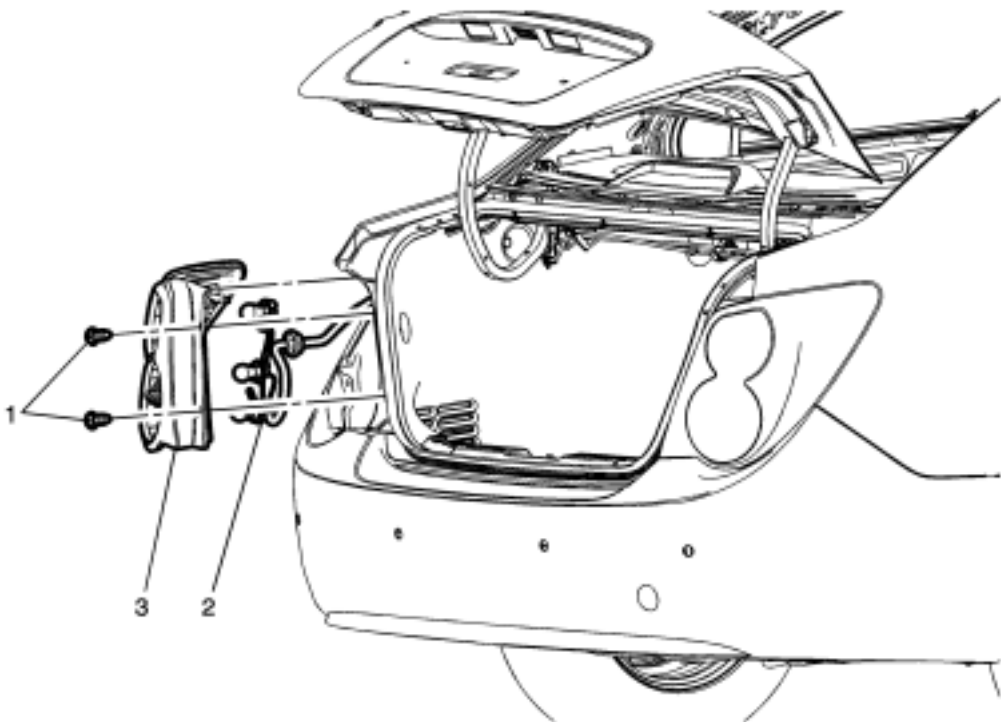

Callout	Component Name
Preliminary Procedure Open and secure the rear compartment lid.	
1	Tail Lamp Bolt/Screw (Qty: 2) Caution: Refer to Fastener Caution . Tighten 2.5N·m (22lbin)
2	Tail Lamp Electrical Harness Procedure Remove all three tail lamp bulb sockets with bulbs.
3	Tail Lamp