


High Mount Stop Lamp Replacement (Sedan)

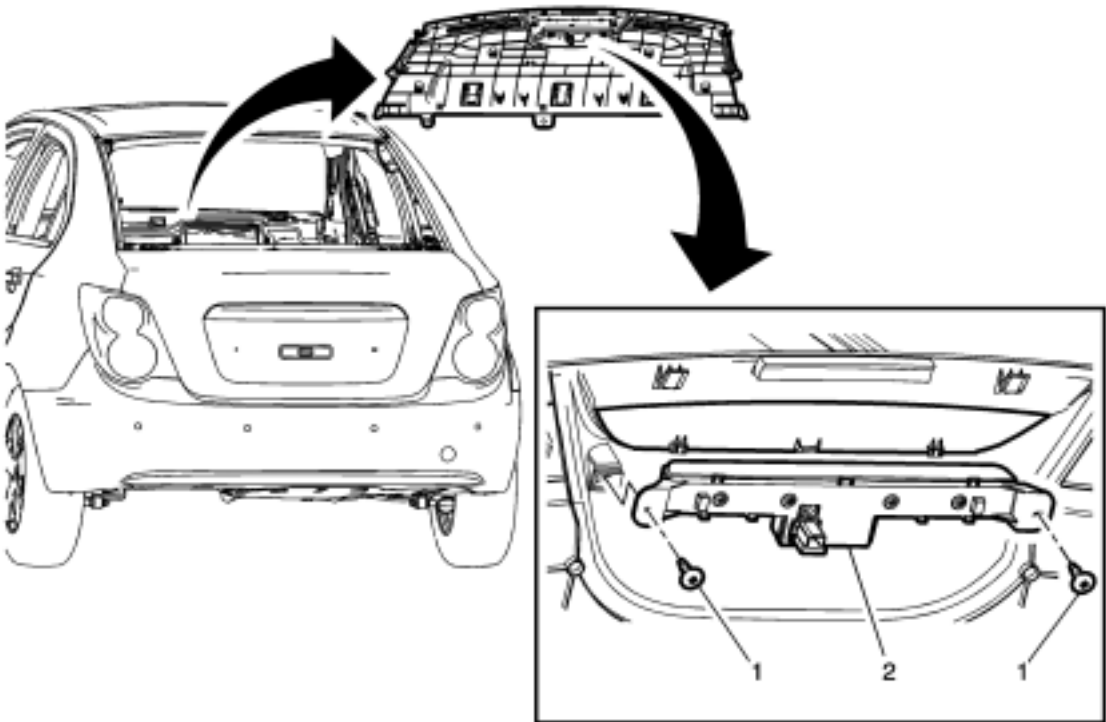

Callout	Component Name
<p>Preliminary Procedure</p> <p>1. Remove the rear window panel trim. Refer to Rear Window Panel Trim Replacement .</p> <p>2. Place the rear window panel trim face down on a clean protected surface to access and remove the high mount stop lamp screws.</p>	
1	<p>High Mount Stop Lamp Screw (Qty: 2)</p> <p>Caution: Refer to Fastener Caution .</p>
2	<p>High Mount Stop Lamp</p> <p>Tip The high mount stop lamp is (LED) Light Emitting Diode and is serviced as an assembly.</p>