


Front Side Door Latch Replacement

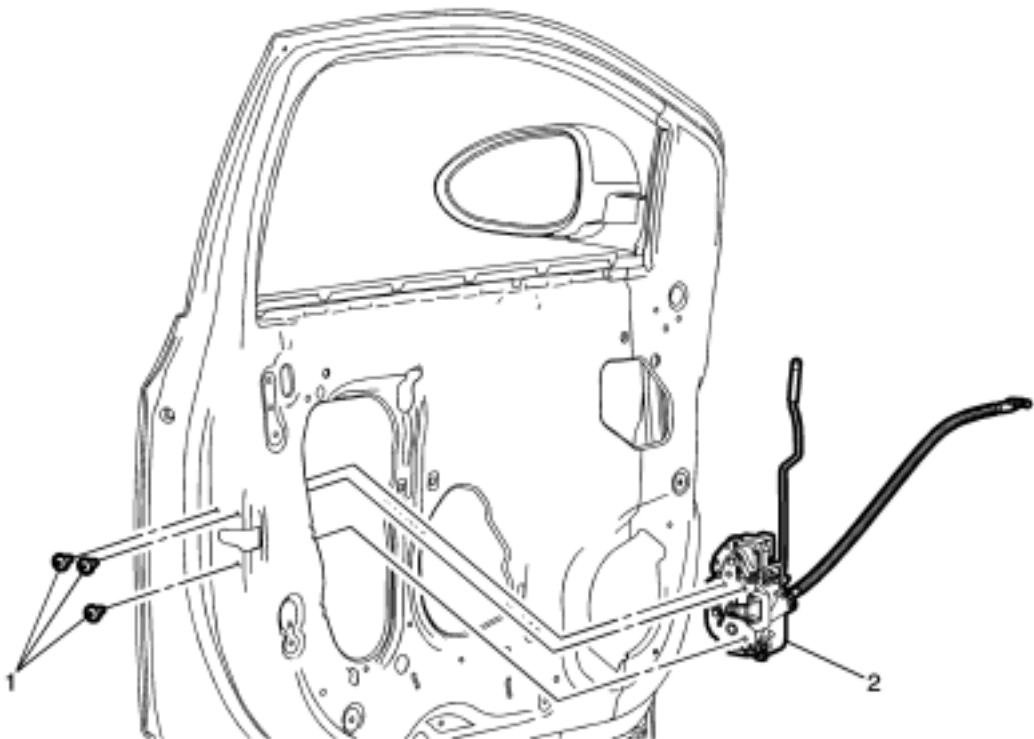

Callout	Component Name
<p>Preliminary Procedure</p> <p>Remove the front side door trim panel. Refer to Front Side Door Trim Replacement .</p>	
1	<p>Front Side Door Lock Screw (Qty: 3)</p> <p>Caution: Refer to Fastener Caution .</p> <p>Procedures</p> <ol style="list-style-type: none">1. Remove the water deflector.2. Release the front inside door handle cable retainers from the door.3. Remove the front side door window rear guide. Refer to Front Side Door Window Rear Guide Replacement . <p>Tighten 10N·m (89lbin)</p>
2	<p>Front Side Door Lock Assembly</p> <p>Procedure</p> <ol style="list-style-type: none">1. Disconnect the front side door lock electrical connector.2. Transfer the front side door lock rods.3. Front outside door handle rod adjustment. Refer to Front Side Door Outside Handle Rod Adjustment .