


Rear Side Door Window Weatherstrip Replacement (Hatchback)

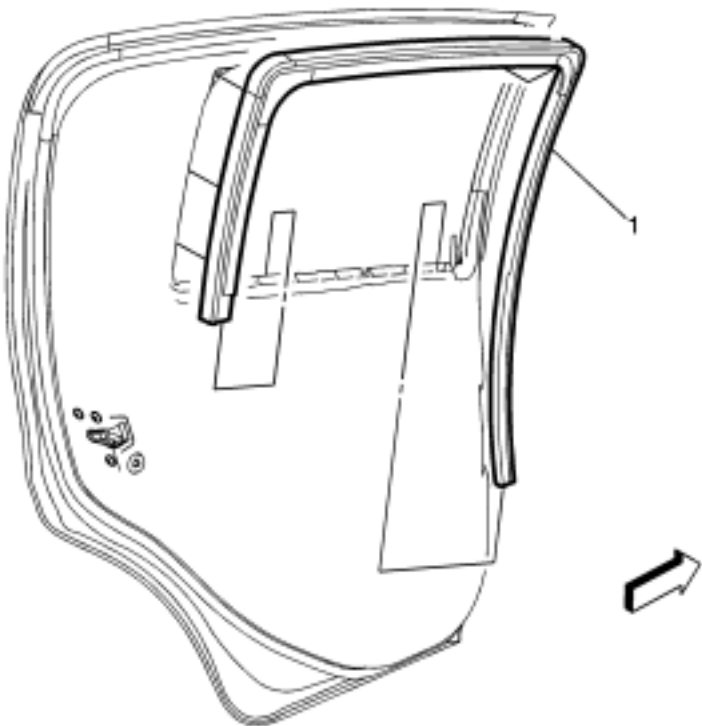

Callout	Component Name
<p>Preliminary Procedure</p> <p>Remove the rear side door window . Refer to Rear Side Door Window Replacement .</p>	
1	<p>Rear Side Door Window Weatherstrip</p> <p>Procedure</p> <ol style="list-style-type: none">1. Remove the rear side door water deflector.2. Remove the weatherstrip from the front and rear lower window guides.3. Grasp both upper corners, pull downward releasing the weatherstrip from the door frame.4. Insert the weatherstrip downward in the window guides until fully seated.5. Carefully move the regulator upward for short slow intervals, while ensuring that the window remains in the guides.6. Inspect the door window for proper operation before installing the door trim panel.