


Rear License Plate Lamp Replacement (Hatchback)

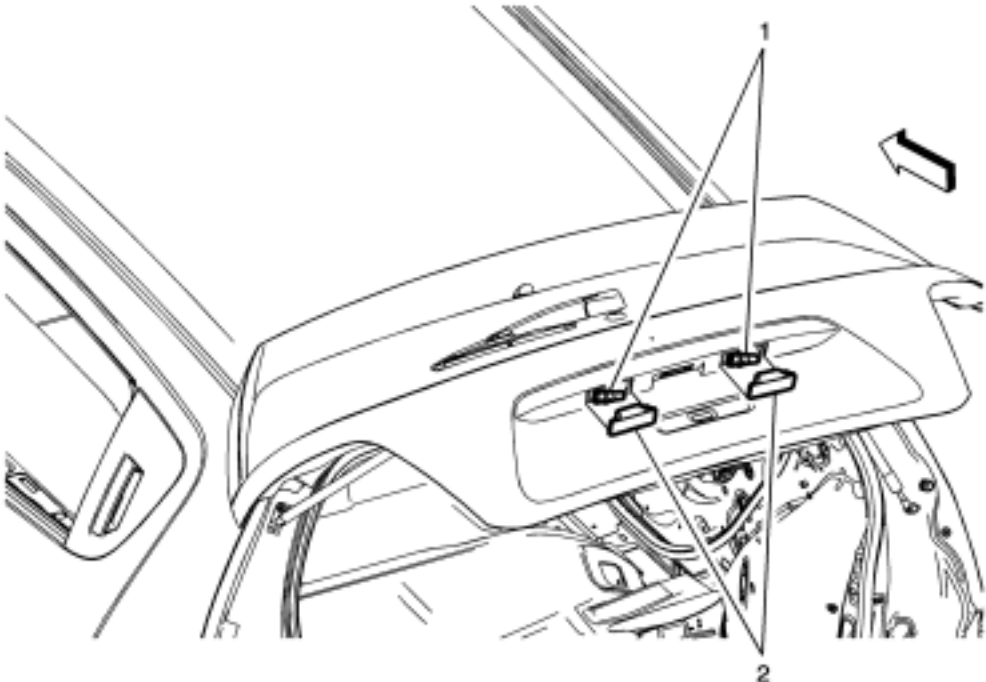

Callout	Component Name
<p>Preliminary Procedure</p> <p>1. Open and support the lift gate assembly.</p> <p>2. At the left side of the lamp, insert a small flat-blade into the lamp housing edge and push slightly sideways to disengage the lamp housing from the rear applique.</p> <p>3. Pull and rotate the housing downward far enough to remove and access the lamp socket and electrical harness.</p>	
1	<p>Rear License Plate Lamp Socket</p> <p>Procedure</p> <p>Rotate the lamp socket counter-clockwise and remove from the lamp housing.</p>
2	<p>Rear License Plate Lamp</p>