


Liftgate Side Applique Replacement (Hatchback)

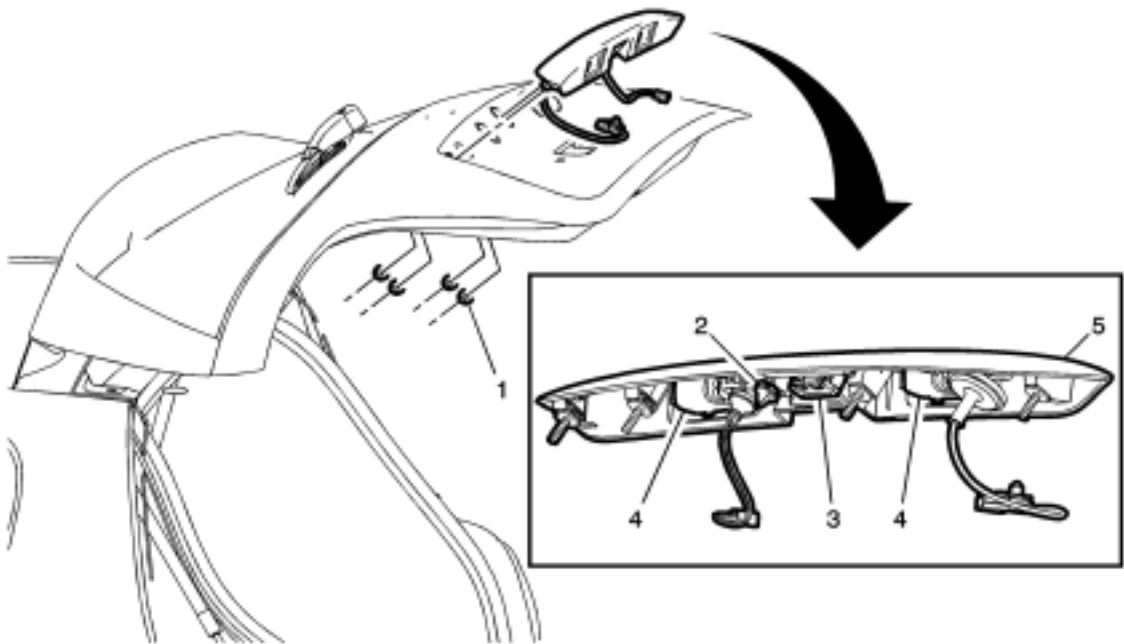

Callout	Component Name
<p>Preliminary Procedure</p> <p>1. Open and support the rear liftgate assembly.</p> <p>2. Remove the liftgate trim finish panel. Refer to Liftgate Trim Finish Panel Replacement .</p> <p>3. Disconnect the electrical connectors.</p> <p>4. Remove the four nuts securing the liftgate side applique to the rear liftgate outer panel.</p> <p>5. Release the liftgate side applique center retainer from the liftgate panel.</p>	
1	<p>Liftgate Side Applique Nut (Qty: 4)</p> <p>Caution: Refer to Fastener Caution .</p> <p>Tighten 5 N·m (44 lbin)</p>
2	<p>Liftgate Side Applique Retainer</p>
3	<p>Liftgate Release Switch</p> <p>Procedure</p> <p>Remove the liftgate release switch. Refer to Liftgate Release Switch Replacement</p>
4	<p>Rear License Plate Lamp (Qty: 2)</p> <p>Procedure</p> <p>Remove the rear license plate lamps. Refer to Rear License Plate Lamp Replacement .</p>
5	<p>Liftgate Side Applique</p>