


Front Fender Replacement

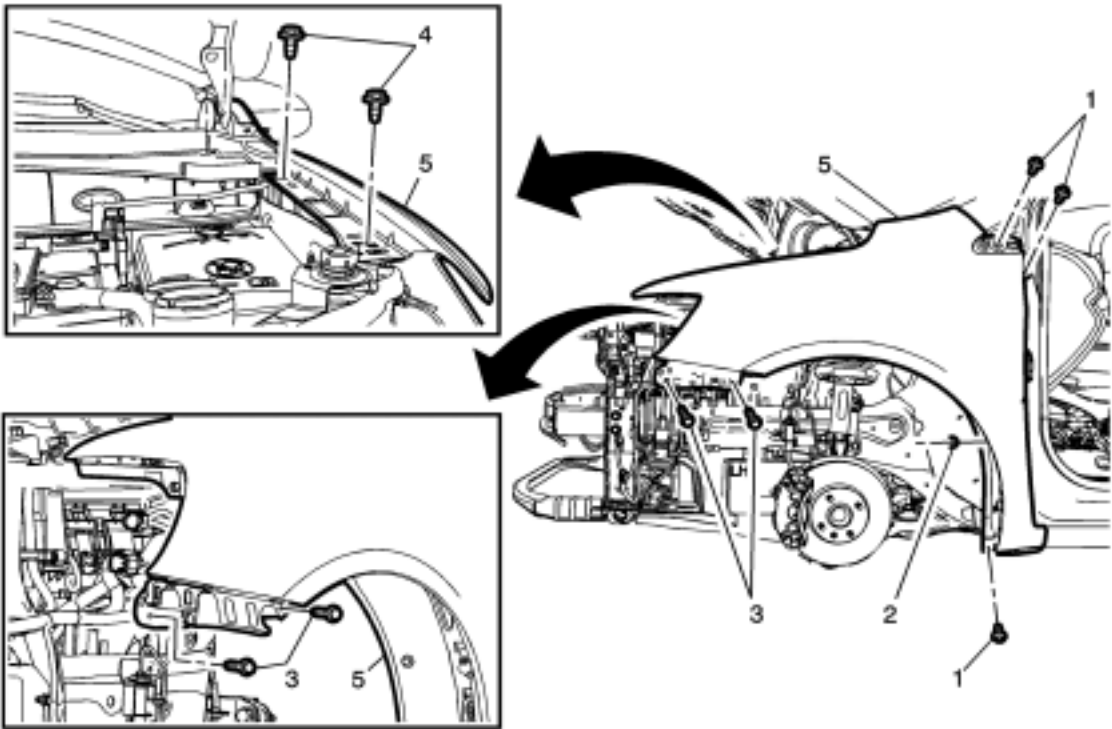

| Callout | Component Name |
|--|--|
| <p>Preliminary Procedures</p> <p>1. Remove the front bumper fascia. Refer to Front Bumper Fascia Replacement .</p> <p>2. Remove the headlamp. Refer to Headlamp Replacement .</p> <p>3. Remove the front wheelhouse liner front and rear. Refer to Front Wheelhouse Liner Replacement .</p> <p>4. Remove the body side upper front applique. Refer to Body Side Upper Front Applique Replacement .</p> <p>5. Remove the front bumper fascia guide. Refer to Front Bumper Fascia Guide Replacement .</p> | |
| 1 | <p>Front Fender Bolt (Qty: 3)</p> <p>Caution: Refer to Fastener Caution .</p> <p>Tighten 9 N·m (80 lbin)</p> |
| 2 | <p>Front Fender Nut</p> <p>Tighten 9 N·m (80 lbin)</p> |
| 3 | <p>Front Fender Bolt (Qty: 2)</p> <p>Tighten 9 N·m (80 lbin)</p> |
| 4 | <p>Front Fender Bolt (Qty: 2)</p> <p>Tighten 9 N·m (80 lbin)</p> |
| 5 | <p>Front Fender</p> <p>Procedure</p> <p>1. Disconnect the electrical connectors.</p> <p>2. Transfer parts as needed.</p> |