


Front Side Turn Signal Lamp Replacement

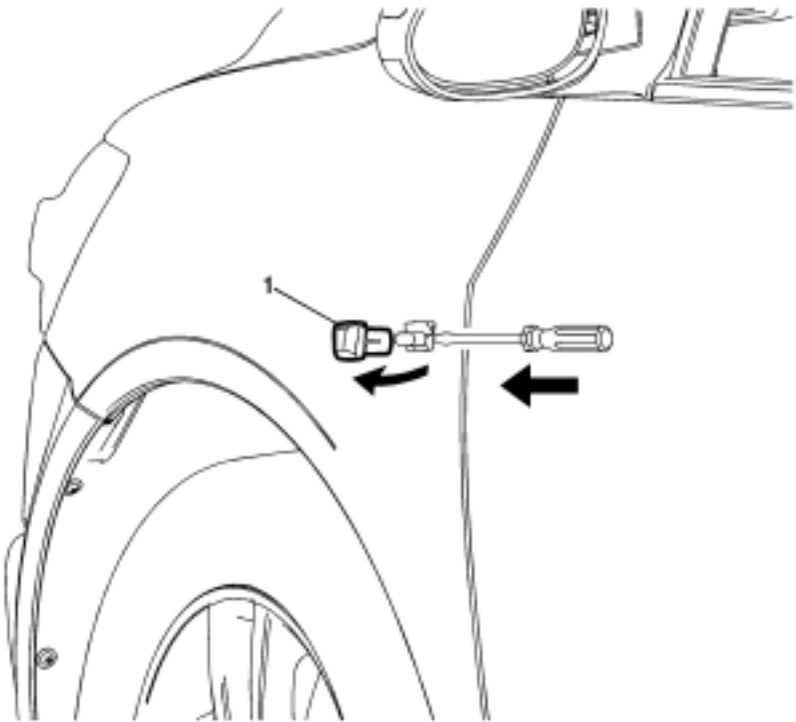

Callout	Component Name
<p>Preliminary Procedures</p> <p>Caution: Refer to Exterior Trim Emblem Removal Caution .</p> <ol style="list-style-type: none">1. Apply a layer of masking tape around the turn signal lamp being serviced.2. Using a small flat-bladed tool, depress the rear edge of the left hand lamp or the front edge of the right hand lamp in order to rotate the lamp from the opening in the fender.3. Rotate forward the lamp housing from the fender opening.4. Rotate the electrical bulb socket counter-clockwise and remove from the housing.	
1	<p>Front Side Turn Signal Lamp Assembly</p> <p>Tip Remove the masking tape from the fender after the lamp has been removed.</p>