


Front Side Door Window Weatherstrip Replacement

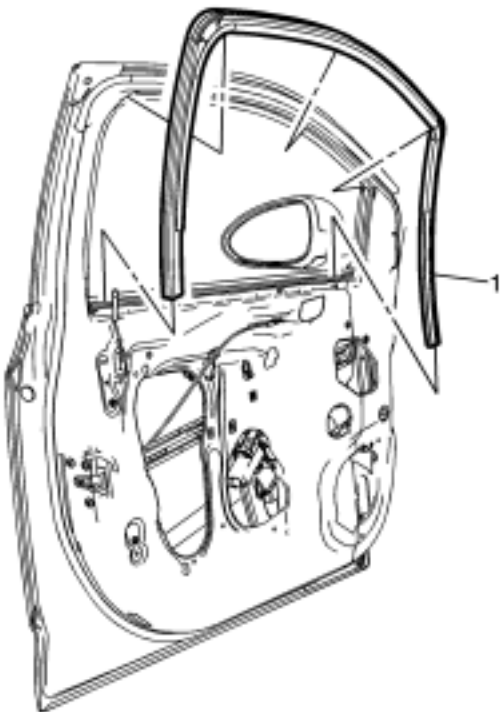

Callout	Component Name
<p>Preliminary Procedures</p> <p>1. Remove front side door trim panel. Refer to Front Side Door Trim Replacement .</p> <p>2. Remove the outside rearview mirror. Refer to Outside Rearview Mirror Replacement .</p>	
1	<p>Front Side Door Window Weatherstrip</p> <p>Procedure</p> <p>1. Place the window in the fully down position.</p> <p>2. Remove the water deflector.</p> <p>3. Grasp both upper corners of the window weatherstrip, pull downward releasing the assembly from the door frame.</p> <p>4. Insert the weatherstrip downward in the front and rear channel until fully seated.</p> <p>5. Position the window weatherstrip in the upper rear corner of the frame, work the weatherstrip around the door frame.</p> <p>6. Carefully move the regulator upward for short slow intervals, while ensuring that the window remains in the channels.</p> <p>7. Inspect the door window for proper operation before installing the door trim panel.</p>