


6. Remove the front suspension strut mount (1), front spring insulator (2), front spring (3), front suspension strut bumper (4), and the front strut (5) from the spring compressor.

Assembly Procedure

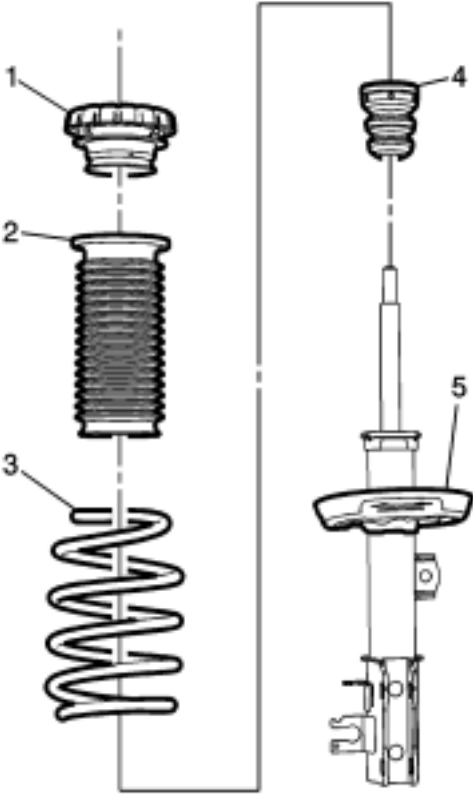

1. Install the front suspension strut (5), front suspension strut bumper (4), front spring (3), front spring insulator (2), and the front suspension strut mount (1) in the spring compressor.