


Front Side Door Trim Replacement

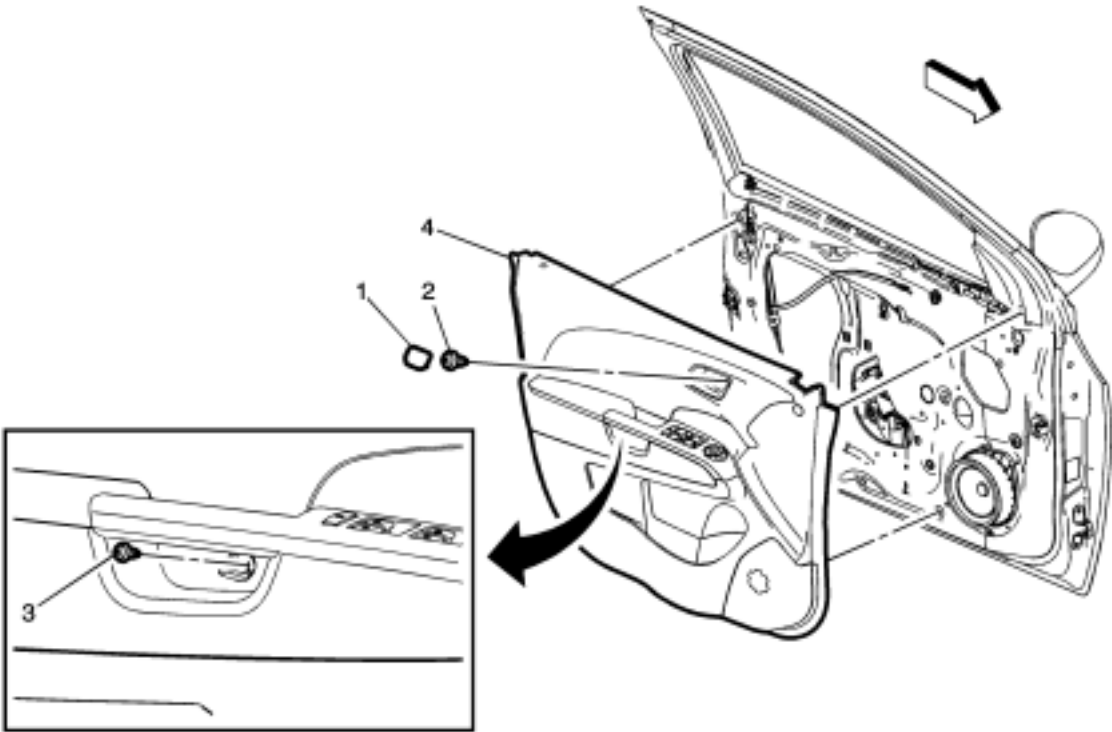

Callout	Component Name
1	Front Side Door Inside Handle Bolt Finish Cap
2	Front Side Door Inside Handle Fastener Caution: Refer to Fastener Caution .
3	Front Side Door Trim Fastener Procedure Use a small flat-bladed tool to open the front side door trim integral cap to access the fastener.
4	Front Side Door Trim Assembly Procedure 1. Use the appropriate plastic trim tool to aid in the removal of the door trim. 2. Pull upwards on the door lock retainer cable to disengage. 3. Disconnect the electrical connector.