


Headlamp Bulb Replacement

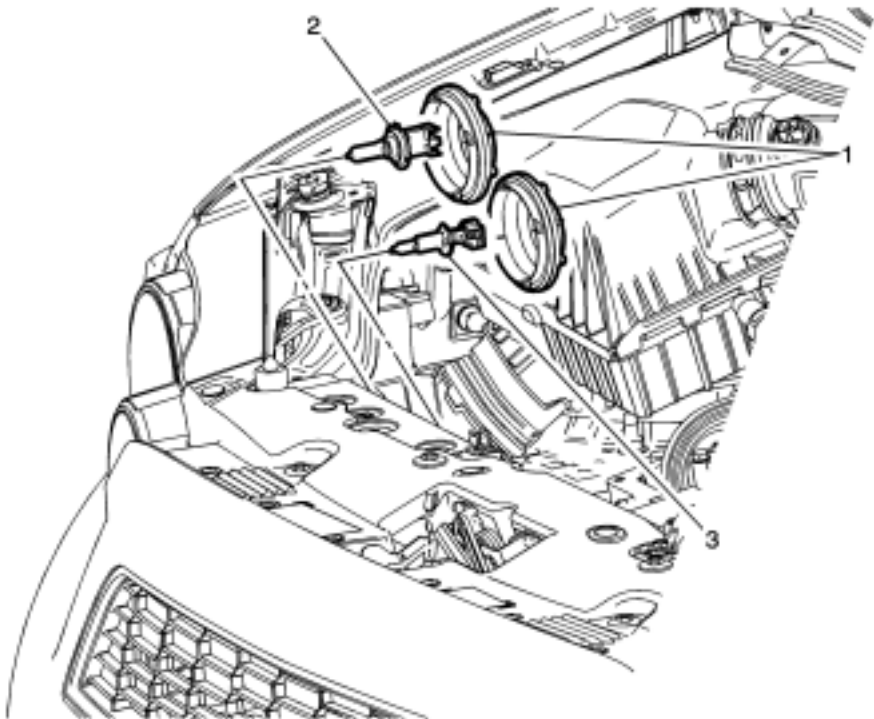

Callout	Component Name
<b>Preliminary Procedure</b> Open and support the hood assembly.	
1	Accessory Bulb Cover (Qty: 2)
2	<b>Warning:</b> Refer to <a href="#">Halogen Bulb Warning</a> .  Headlamp Bulb (Low Beam)  <b>Procedure</b>  1. Disconnect the electrical connector from the bulb socket. 2. Rotate the bulb socket and remove from the headlamp housing.
3	Headlamp Bulb (High Beam)  <b>Procedure</b>  1. Disconnect the electrical connector from the bulb socket. 2. Rotate the bulb socket a quarter turn and remove from the headlamp housing.