


Drivetrain and Front Suspension Frame Skid Plate Replacement


Removal Procedure

1. Raise and support the vehicle. Refer to [Lifting and Jacking the Vehicle](#) .

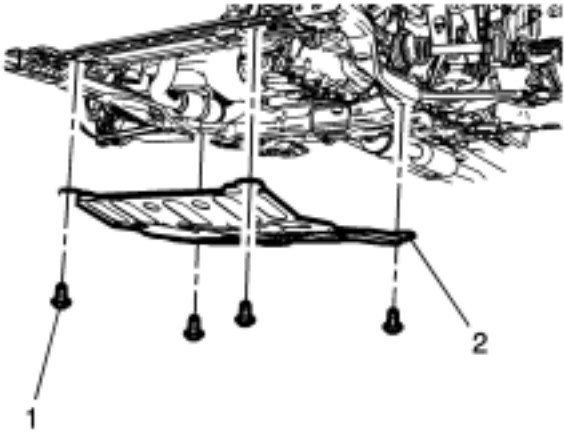

2. Remove the mounting bolts (1) for the front suspension frame skid plate.
3. Remove the front suspension frame skid plate (2).

Installation Procedure

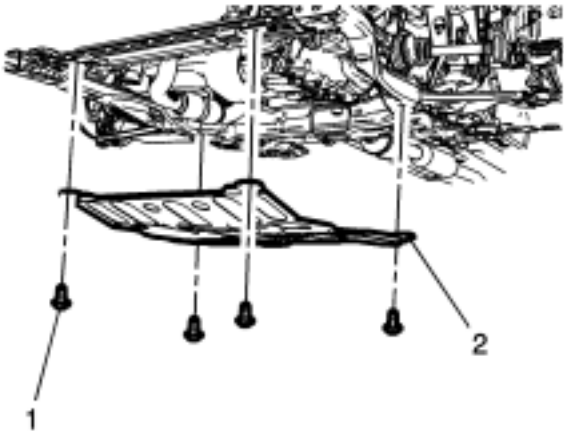

1. Position the front suspension frame skid plate (2) on the frame.

- Caution:** Refer to [Fastener Caution](#) .
2. Install the front suspension frame skid plate mounting bolts (2) and tighten to **22 N·m (16 lb ft)**.