



Instrument Panel Tie Bar Replacement

Removal Procedure


1. Remove the Instrument panel assembly. Refer to [Instrument Panel Assembly Replacement](#) .
2. Remove the steering column and wheel from the vehicle. Refer to [Steering Column Replacement](#) .
3. Remove the air inlet grill panel. Refer to [Air Inlet Grille Panel Replacement](#) .

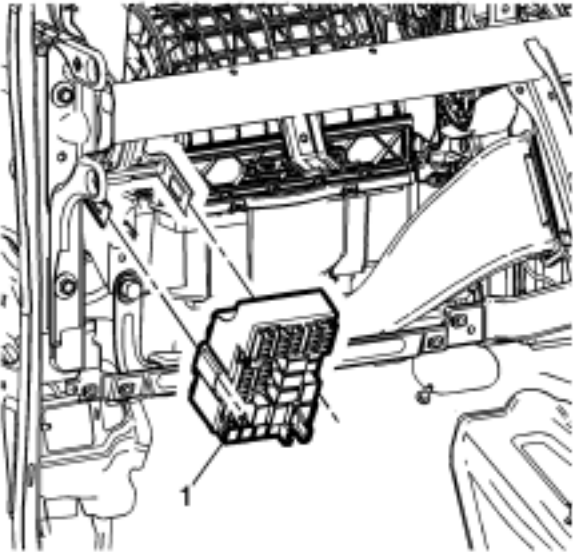

4. Unsnap the instrument panel fuse block (1) from the instrument panel tie bar assembly and position out of the way.

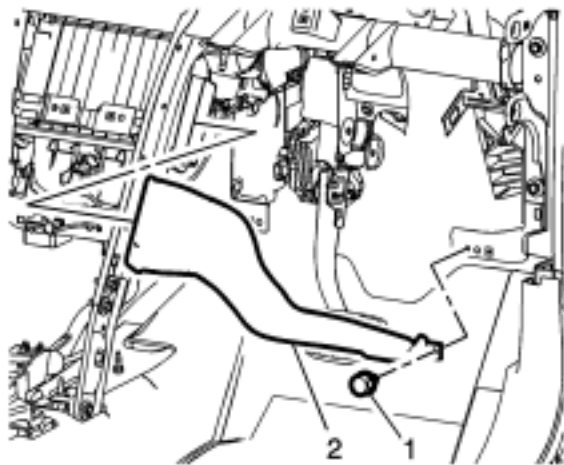

5. Remove the push-pin fastener (1) securing the left floor air outlet duct (2) to the instrument panel tie bar assembly.
6. Remove the left floor air outlet duct (2) from the vehicle.

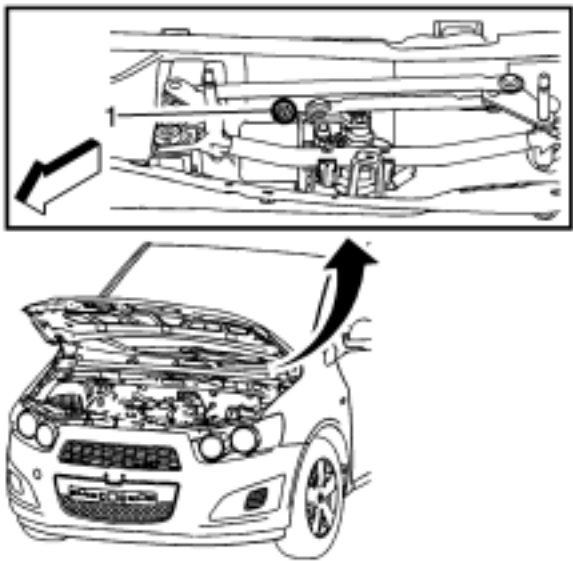

7. Remove the nut (1) securing the instrument panel tie bar assembly to the cowl panel.