


Front Side Door Upper Hinge and Lower Hinge Replacement

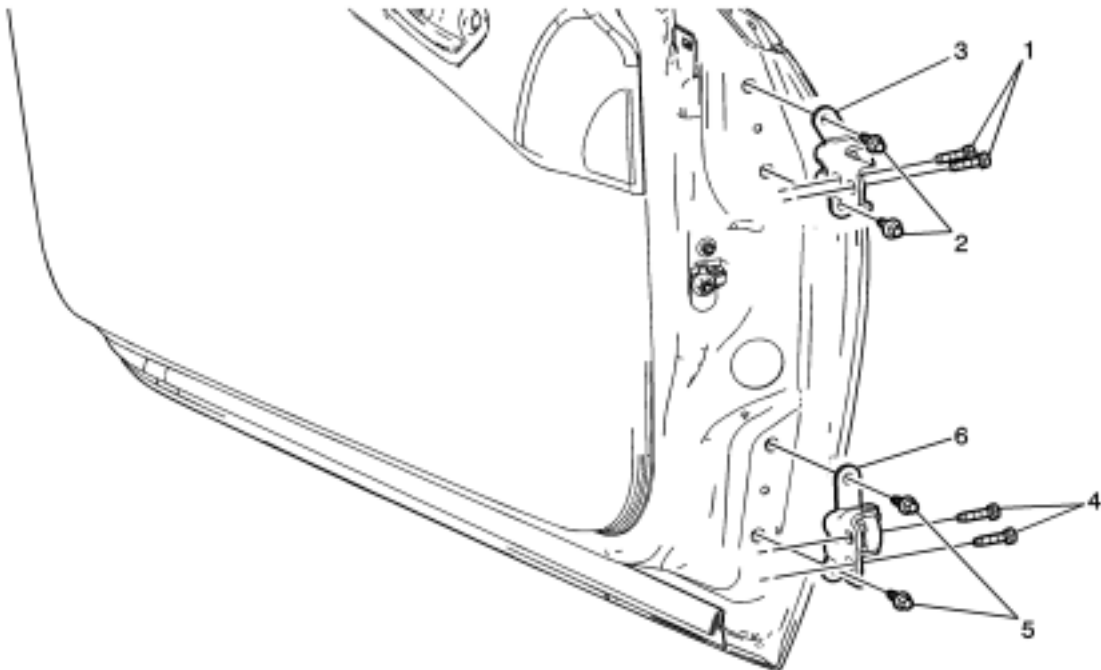

Callout	Component Name
1	<p>Front Side Door Upper Hinge to Body Bolt (Qty: 2)</p> <p>Caution: Refer to Fastener Caution .</p> <p>Procedures</p> <p>1. Before removing the door, apply a double layer of masking tape around the perimeter of the painted surfaces.</p> <p>2. Mark the location of the hinge being removed.</p> <p>3. Remove the front wheelhouse liner. Refer to Front Wheelhouse Liner Replacement .</p> <p>4. Support the door before removing the hinge bolts.</p> <p>Tighten 32 N·m (24 lbft)</p>
2	<p>Front Side Door Upper Hinge to Door Bolt (Qty: 2)</p> <p>Tighten 25 N·m (18 lbft)</p>
3	<p>Front Side Door Upper Hinge</p>
4	<p>Front Side Door Lower Hinge to Body Bolt (Qty: 2)</p> <p>Tighten 32 N·m (24 lbft)</p>
5	<p>Front Side Door Lower Hinge to Door Bolt (Qty: 2)</p> <p>Tighten 25 N·m (18 lbft)</p>
6	<p>Front Side Door Lower Hinge</p> <p>Procedure</p> <p>If the door striker needs adjust. Refer to Front Side Door Lock Striker Adjustment .</p>