


Rear Side Door Window Regulator Motor Replacement

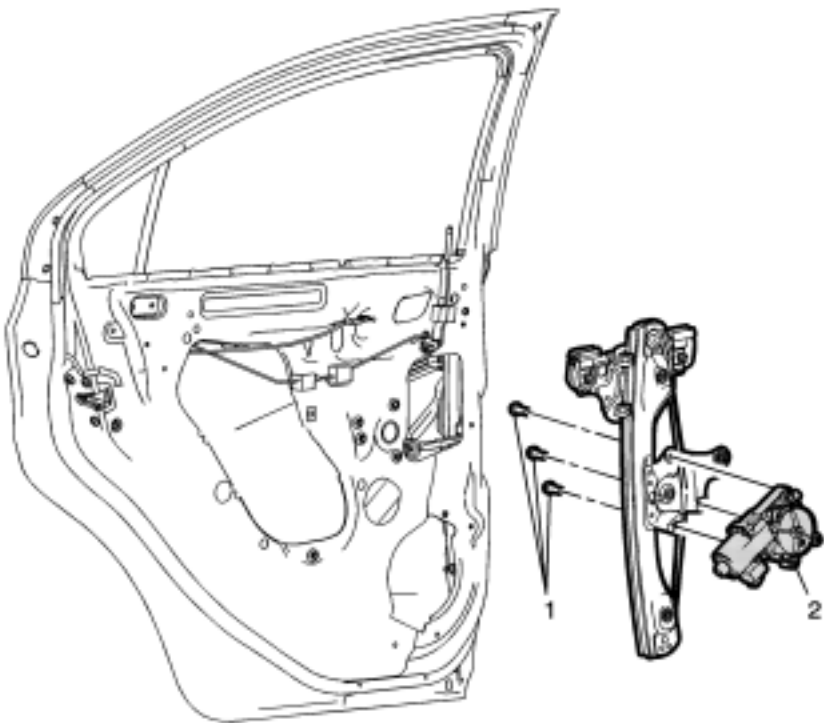

Callout	Component Name
<p>Warning: Refer to Glass and Sheet Metal Handling Warning .</p> <p>Preliminary Procedure</p> <p>Remove the rear side door window regulator. Refer to Rear Side Door Window Regulator Replacement .</p>	
1	<p>Rear Side Door Window Regulator Motor Screw (Qty: 3).</p> <p>Caution: Refer to Fastener Caution .</p> <p>Procedure</p> <p>1. Remove the rear side door water deflector.</p> <p>2. Remove the rear side door window from the guide. Do Not remove the window from the vehicle, raise the window to the fully up position, tape in place.</p> <p>3. Disconnect the electrical connector from the window regulator motor.</p> <p>Tighten 5 N·m (44 lbin)</p>
2	<p>Rear Side Door Window Regulator Motor</p> <p>Procedure</p> <p>Inspect the door window for proper operation before installing the door trim panel.</p>