


Rear Compartment Lid Applique Replacement

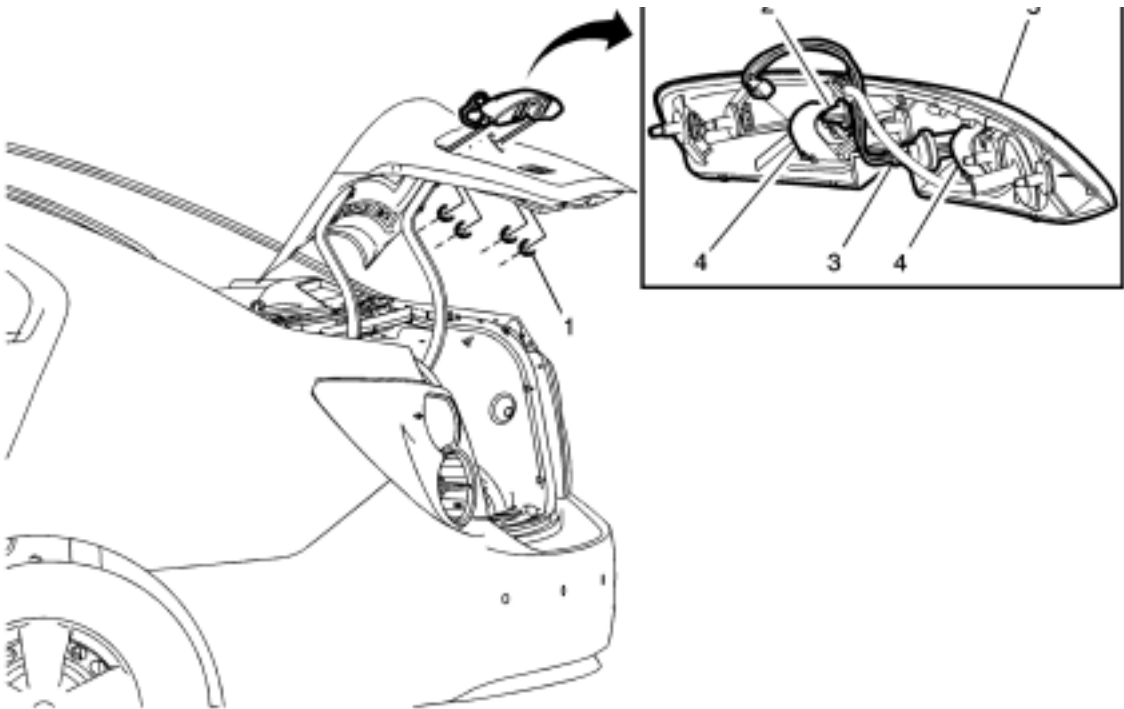

Callout	Component Name
<p><b>Preliminary Procedure</b></p> <p>1. Open and support the rear compartment lid.</p> <p>2. Remove the rear compartment lid inner panel trim. Refer to <a href="#">Rear Compartment Lid Inner Panel Trim Replacement</a> .</p> <p>3. Disconnect the electrical connectors.</p> <p>4. Remove the four nuts securing the rear compartment lid applique to the rear compartment lid.</p> <p>5. Release the center retainer from the rear compartment lid.</p>	
1	<p>Rear Compartment Lid Applique Nut (Qty: 4)</p> <p><b>Caution:</b> Refer to <a href="#">Fastener Caution</a> .</p> <p><b>Tighten</b> 5 N·m (44 lbin)</p>
2	<p>Rear Compartment Lid Retainer</p>
3	<p>Liftgate Release Switch</p> <p><b>Procedure</b></p> <p>Remove the liftgate release switch. Refer to <a href="#">Liftgate Release Switch Replacement</a></p>
4	<p>Rear License Plate Lamp (Qty: 2)</p> <p><b>Procedure</b></p> <p>Remove the rear license plate lamps. Refer to <a href="#">Rear License Plate Lamp Replacement</a> .</p>
5	<p>Rear Compartment Lid Applique</p>