


Rear Side Door Outside Handle Replacement (Hatchback)

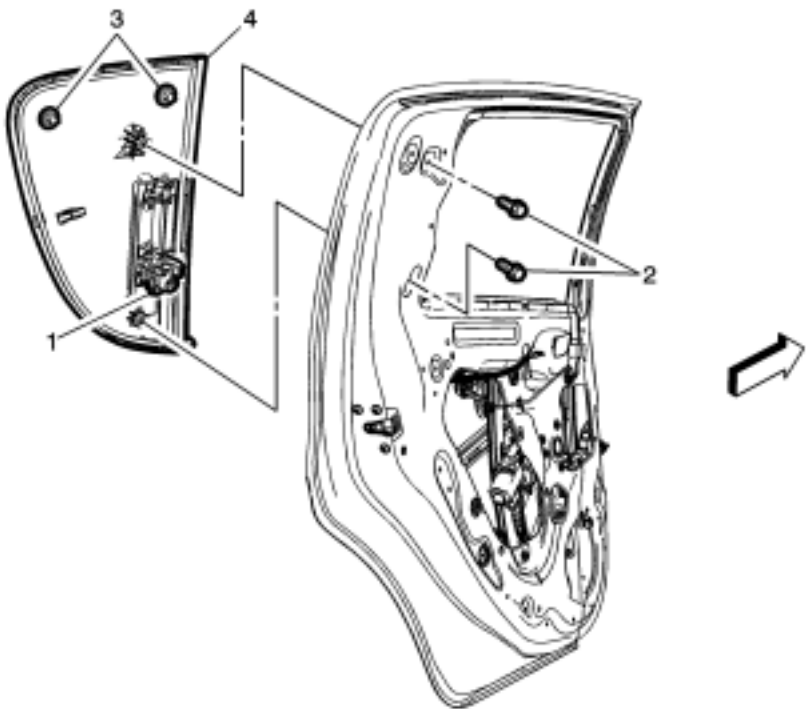

Callout	Component Name
<p>Preliminary Procedures</p> <p>Remove the rear side door trim panel. Refer to Rear Side Door Trim Replacement .</p>	
1	<p>Rear Side Door Outside Handle Rod Clip</p> <p>Procedure</p> <p>1. Place the window in the full up position. 2. Remove the water deflector. 3. Remove the outside door handle rod from the clip, Do not remove the rod from the door lock.</p>
2	<p>Rear Side Door Outside Handle Screws (Qty: 2)</p> <p>Caution: Refer to Fastener Caution .</p> <p>Tighten 9 N·m (80 lbin)</p>
3	<p>Rear Side Door Outside Handle Push-In Retainers (Qty: 2)</p> <p>Tip If the retainers are broken when removing they Must be replaced.</p>
4	<p>Rear Side Door Outside Handle</p> <p>Procedure</p> <p>In order to prevent outside handle lever pre-load, lock, outside handle shall be fully secured to the door prior to securing integral lock clip to outside handle rod. Integral lock clip shall be in the full up position while securing to outside handle rod. Refer to Rear Side Door Outside Handle Rod Adjustment .</p> <p>Tip Inspect the door lock system for proper operation before installing the door trim panel.</p>