


Rear Side Door Check Link Replacement

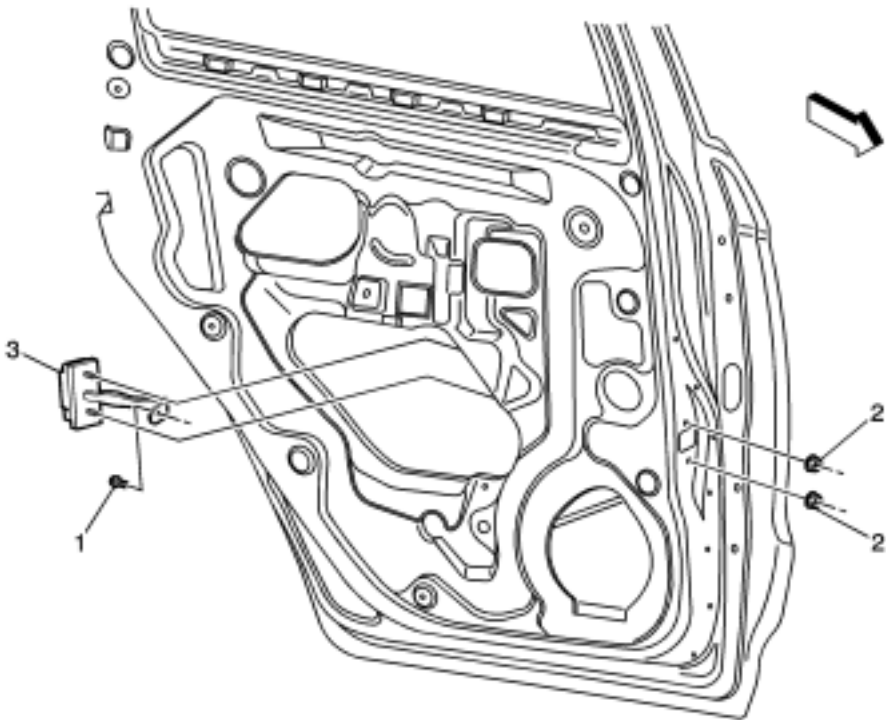

Callout	Component Name
<p>Preliminary Procedures</p> <p>1. Move the window to the full up position.</p> <p>2. Remove the rear side door trim panel. Refer to Rear Side Door Trim Replacement</p>	
1	<p>Rear Side Door Check Link Bolt to Body</p> <p>Caution: Refer to Fastener Caution</p> <p>Tighten 22 N·m (16 lbft)</p>
2	<p>Rear Side Door Check Link Nut (Qty: 2)</p> <p>Procedure</p> <p>Remove the water deflector.</p> <p>Tighten 9 N·m (80 lbin)</p>
3	<p>Rear Side Door Check Link Assembly</p>