


Front License Plate Bracket Replacement

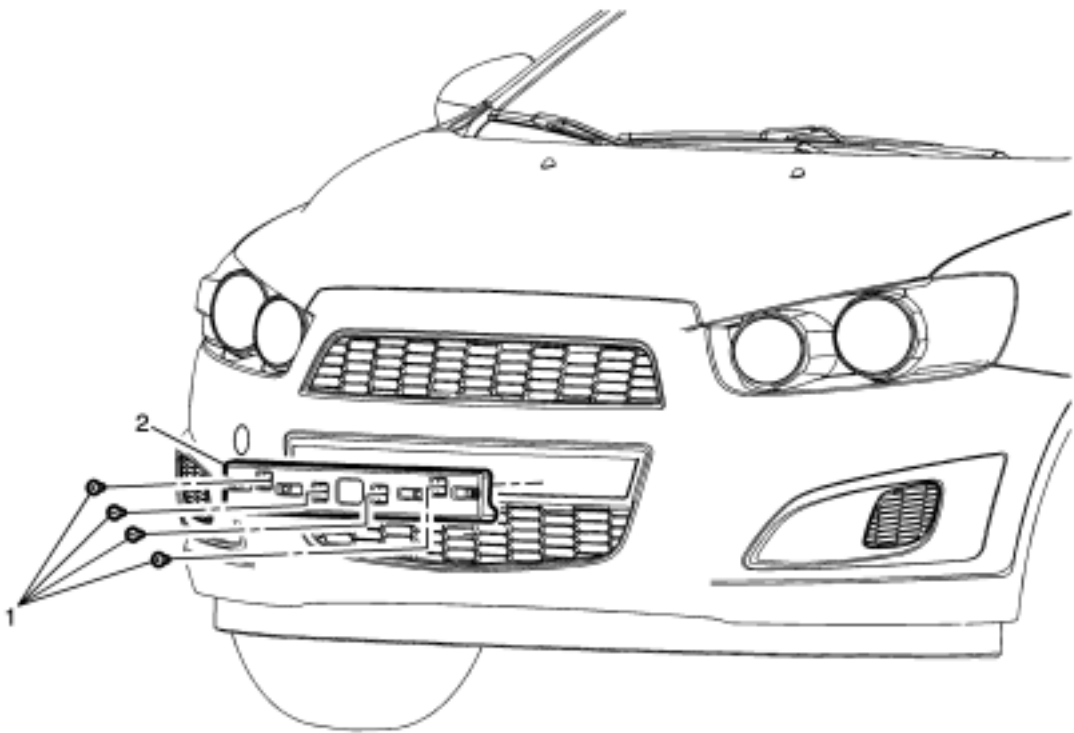

Callout	Component Name
<p>Preliminary Procedure</p> <p>Remove the front license plate if equipped.</p>	
1	<p>Front License Plate Bracket Screw (Qty: 4)</p> <p>Caution: Refer to Fastener Caution .</p> <p>Tighten 1.5 N·m (13 lbin)</p>
2	<p>Front License Plate Bracket</p>