


Rear Window Reveal Molding Replacement

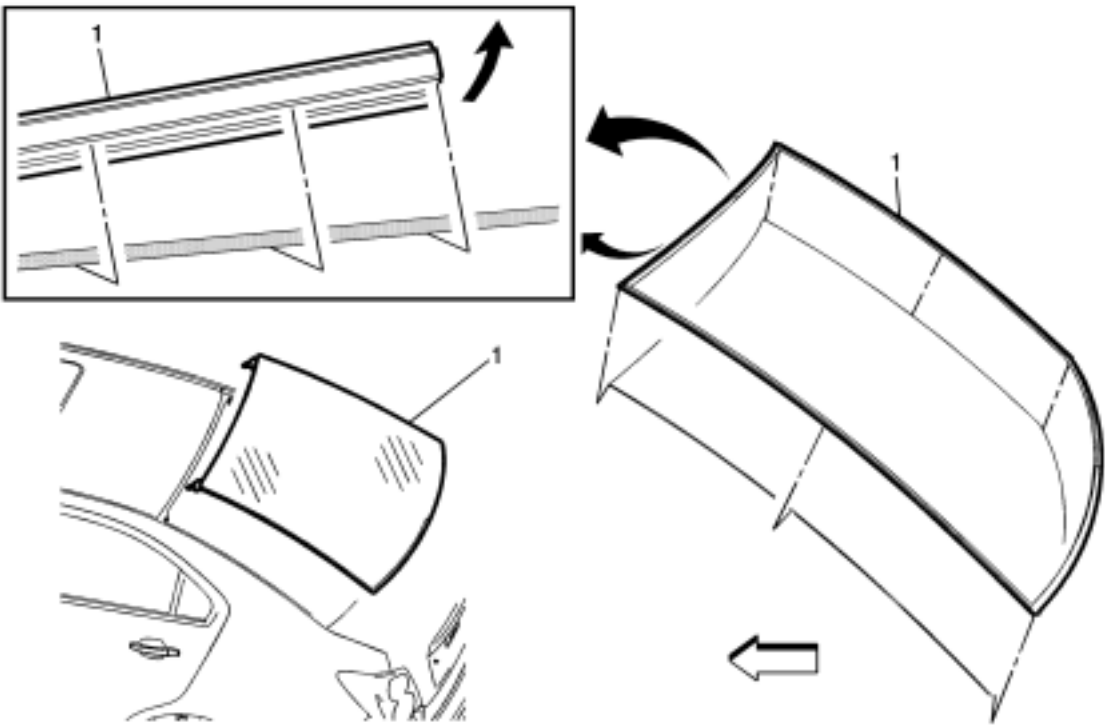

Callout	Component Name
<p>Preliminary Procedures</p> <p>Remove the rear window to replace the reveal molding. Refer to Rear Window Replacement .</p>	
1	<p>Rear Window Reveal Molding</p> <p>Warning: Refer to Glass and Sheet Metal Handling Warning .</p> <p>Procedure</p> <ol style="list-style-type: none">1. Mark the window at both ends before remove the reveal molding for installing.2. Place the window on a clean and dry surface.3. Use a suitable plastic tool, use care when releasing the reveal molding not to pry on the window.4. Clean around the edges and surface of the window and molding with a 50/50 mixture of isopropyl alcohol and water by volume on a dampened lint free cloth.