


Front Bumper Fascia Replacement

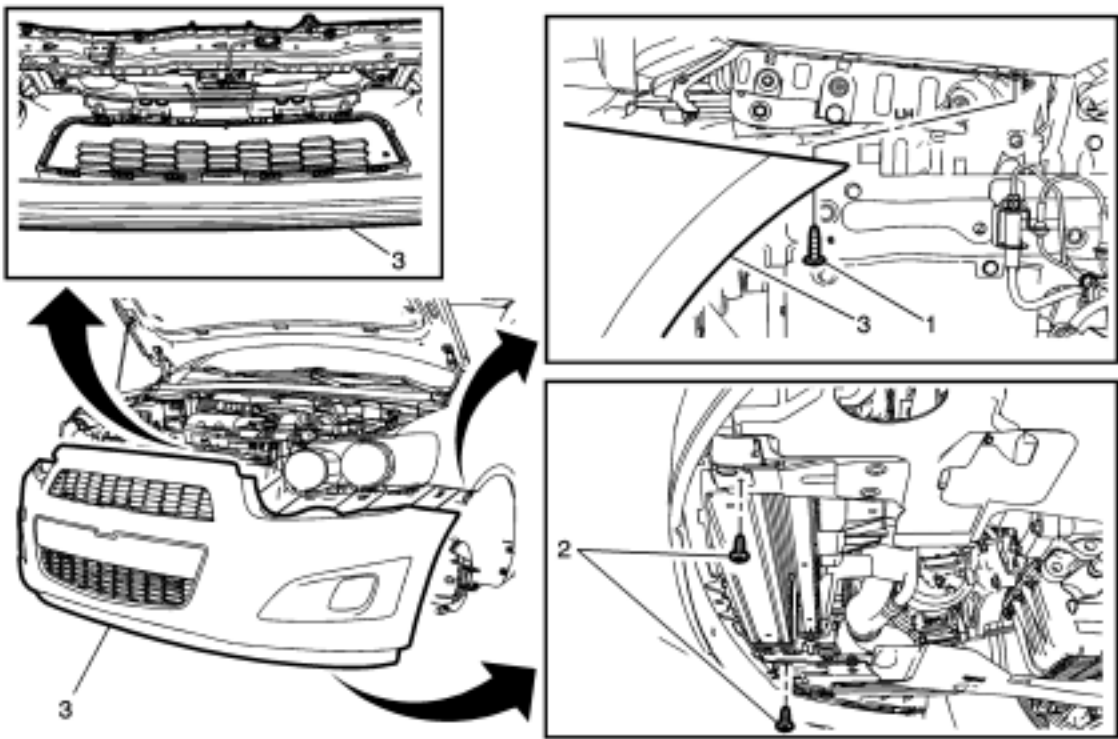

Callout	Component Name
<p>Preliminary Procedures</p> <p>1. Remove the radiator opening upper cover. Refer to Radiator Opening Upper Cover Replacement .</p> <p>2. Remove the front bumper opening lower cover. Refer to Front Bumper Fascia Opening Lower Cover Replacement .</p> <p>3. Remove the front wheelhouse front liner. Refer to Front Wheelhouse Liner Replacement .</p> <p>4. Disconnect the ambient air temperature sensor from the lower grille.</p>	
1	<p>Front Bumper Fascia Screw (Qty: 2)</p> <p>Caution: Refer to Fastener Caution .</p> <p>Tighten 6 N·m (53 lbin)</p>
2	<p>Front Bumper Fascia Lower Screw (Qty: 2)</p> <p>Tighten 6 N·m (53 lbin)</p>
3	<p>Front Bumper Fascia</p> <p>Procedure</p> <p>1. Carefully push a small nylon wedge between the fascia and the bracket. Insert a small flat-bladed tool into the fascia slot and depress the tabs one at a time and pull the fascia wings off in the forward direction rather than outboard to gradually remove the fascia from the bracket.</p> <p>2. Disconnect the electrical connectors.</p> <p>3. On reassembly of the front fascia to the vehicle, ensure the 4 support retainers on the inside of the radiator grille bumper are in position to the front bumper fascia center support bracket.</p>