


Front Side Door Weatherstrip Replacement - Door Side

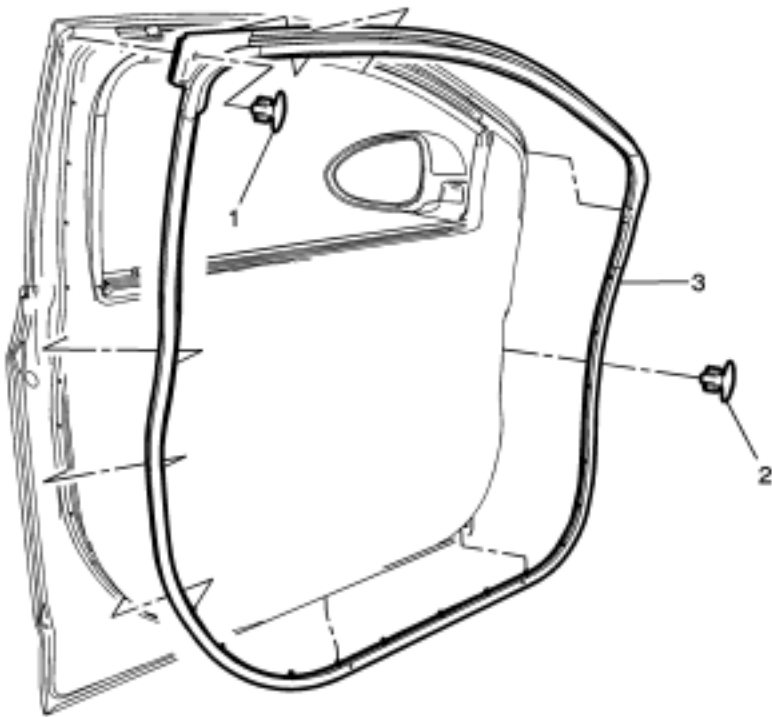

Callout	Component Name
1	<div>Front Side Door Weatherstrip Upper Retainer</div> <div><b>Procedure</b><div><div>1. Open the front side door to the fully open position.</div><div>2. Remove the front side door check link bolt from the body side only . Refer to <a href="#">Front Side Door Check Link Replacement</a> .</div><div>3. Use a suitable tool, remove the push-in retainer from the upper rear corner of the door.</div><div>4. Pull the weatherstrip out of the door retainer.</div></div></div>
2	<div>Front Side Door Weatherstrip Retainers (Qty: 21)</div>
3	<div>Front Side Door Weatherstrip</div> <div><b>Procedure</b><div><div>1. Ensure that the weatherstrip is fully seated in the door frame retainer.</div><div>2. Verify proper door operation.</div></div></div>