


Radiator Lower Grille Replacement

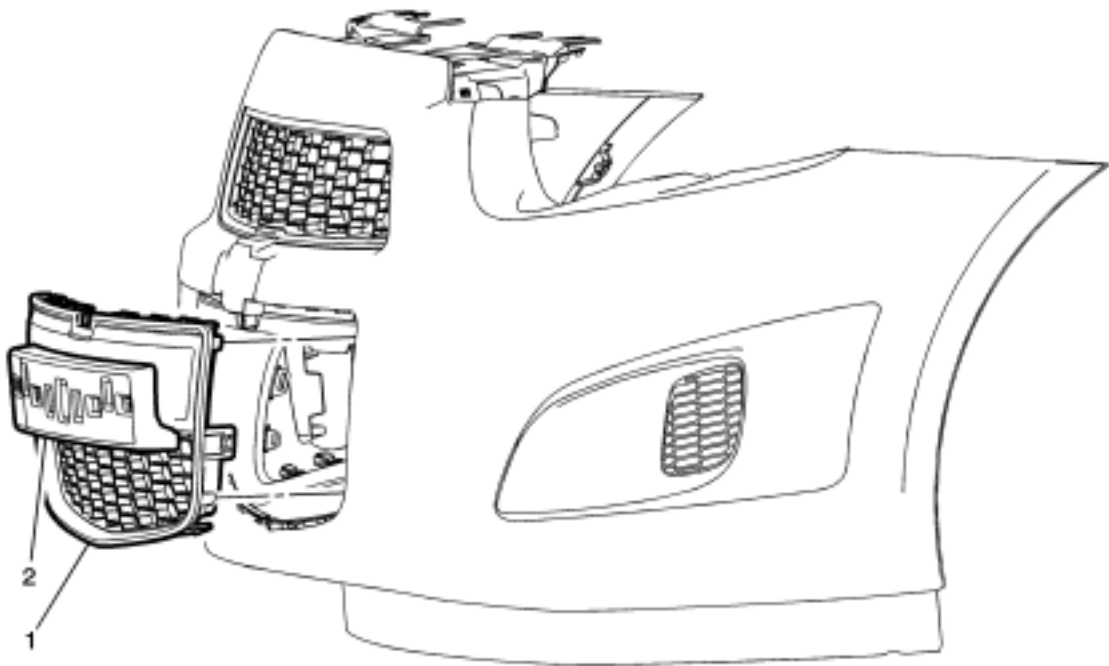

Callout	Component Name
<p>Preliminary Procedures</p> <p>1. Remove the front bumper fascia assembly. Refer to Front Bumper Fascia Replacement .</p> <p>2. Remove the front bumper fascia energy absorber. Refer to Front Bumper Energy Absorber Replacement .</p>	
1	<p>Radiator Lower Front Grille</p> <p>Procedure</p> <p>1. Release the four upper tabs from the front bumper fascia.</p> <p>2. Release the two outer center tabs from the front bumper fascia.</p> <p>3. Release the four lower tabs from the front bumper fascia.</p> <p>4. Push the lower grille assembly outward, from the front bumper fascia in order to remove.</p> <p>5. Upon installation, index the right center alignment pin to the front bumper fascia first, followed by the ten locking tabs on the lower grille assembly to the front bumper fascia.</p> <p>6. Push the locking tabs inward at all ten locations, in order to secure the radiator lower front grille to the front bumper fascia.</p>
2	<p>Front License Plate Bracket Assembly</p> <p>Procedure</p> <p>Remove the four screws and the front license plate bracket to transfer to the new lower front grille assembly, (if equipped).</p>