


Rear Seat Back Cushion Replacement (AN1 Fixed Bench)

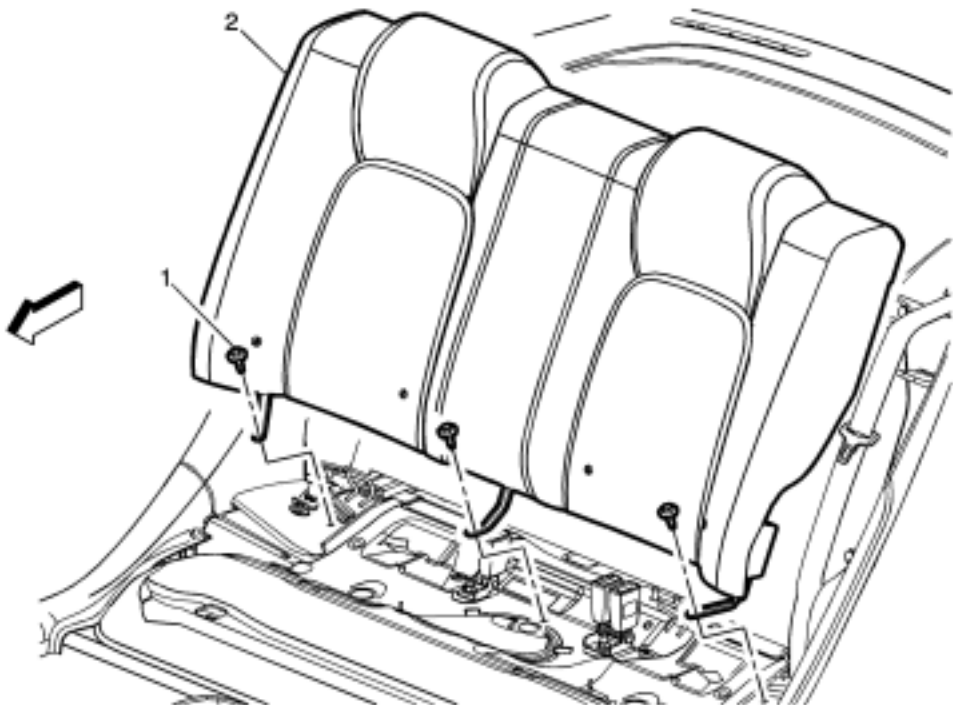

Callout	Component Name
<p>Preliminary Procedure</p> <p>Remove the rear seat cushion. Refer to Rear Seat Cushion Replacement</p>	
1	<p>Rear Seat Back Cushion Bolt (Qty: 3)</p> <p>Caution: Refer to Fastener Caution .</p> <p>Tighten 22N·m (16lbft)</p>
2	<p>Rear Seat Back Cushion</p> <p>Procedure</p> <p>1. Remove the rear outboard shoulder belts from the shoulder belt bezel and position it out of the way, if equipped.</p> <p>2. Pull the seat back cushion forward and upward to remove from the vehicle.</p> <p>3. Transfer components as necessary.</p>