


Front Side Door Upper Hinge and Lower Hinge Replacement

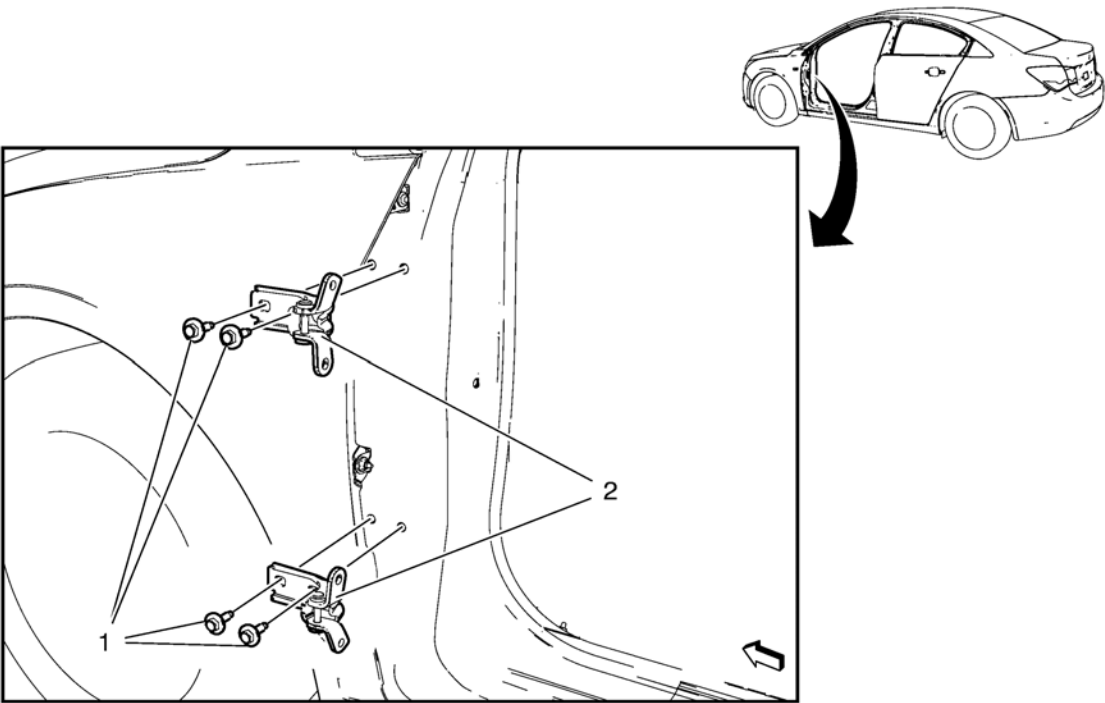

Callout	Component Name
Preliminary Procedure 1. Remove the front wheelhouse liner. Refer to Front Wheelhouse Liner Replacement . 2. Remove the front fender insulator. Refer to Front Fender Insulator Replacement . 3. Remove the front side door. Refer to Front Side Door Replacement .	
1	Front Side Door Hinge Bolt (Qty: 4) Caution: Refer to Fastener Caution in the Preface section. Tighten 25 N·m (19 lb ft)
2	Front Side Door Hinge Procedure Adjust front side door as needed. Refer to Front Side Door Adjustment .