


Front Side Door Outside Handle Rod Adjustment

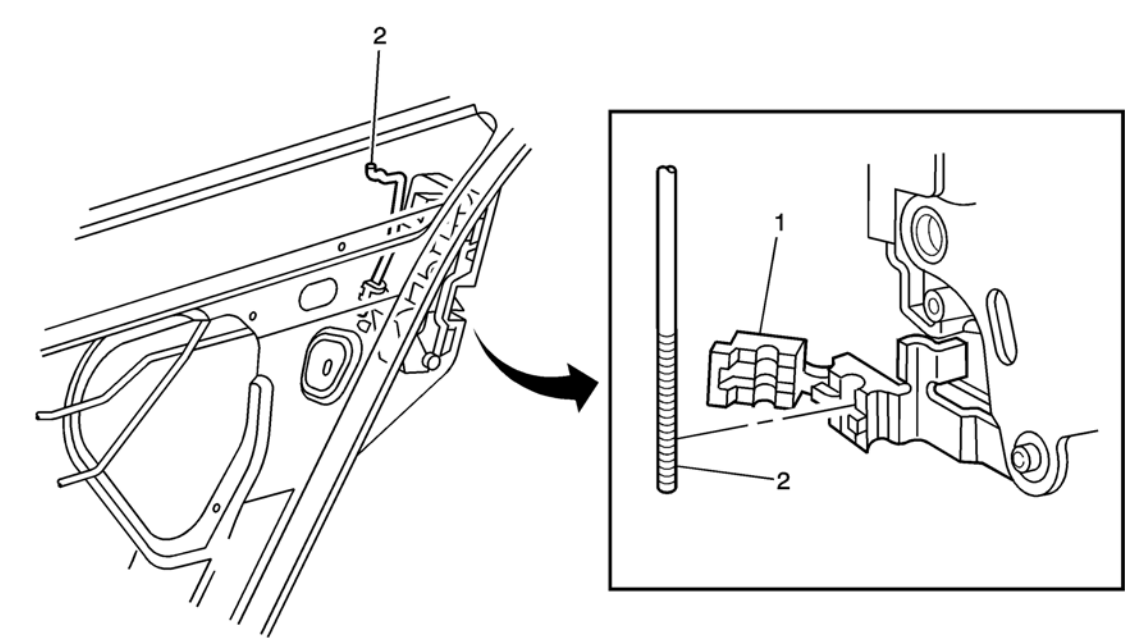

Callout	Component Name
Preliminary Procedure Remove the water deflector. Refer to Front Side Door Water Deflector Replacement .	
1	<div>Outside Door Handle Rod Clip</div> <div>Procedure</div> <div>Use a flat-head tool to open the clip from the threaded rod connecting the lock to the outside handle.</div>
2	<div>Outside Door Handle Rod</div> <div>Procedure</div> <div><div>1. Position the outside door handle rod (2) in the clip (1) in order to eliminate any free play in the outside door handle.</div><div>2. Adjust the travel of the handle by removing the threaded rod in the clip.</div><div>3. Install the clip cover closed over the threaded outside door handle rod.</div><div>4. Inspect the door lock system for proper operation.</div></div>