


## Rear Side Door Replacement

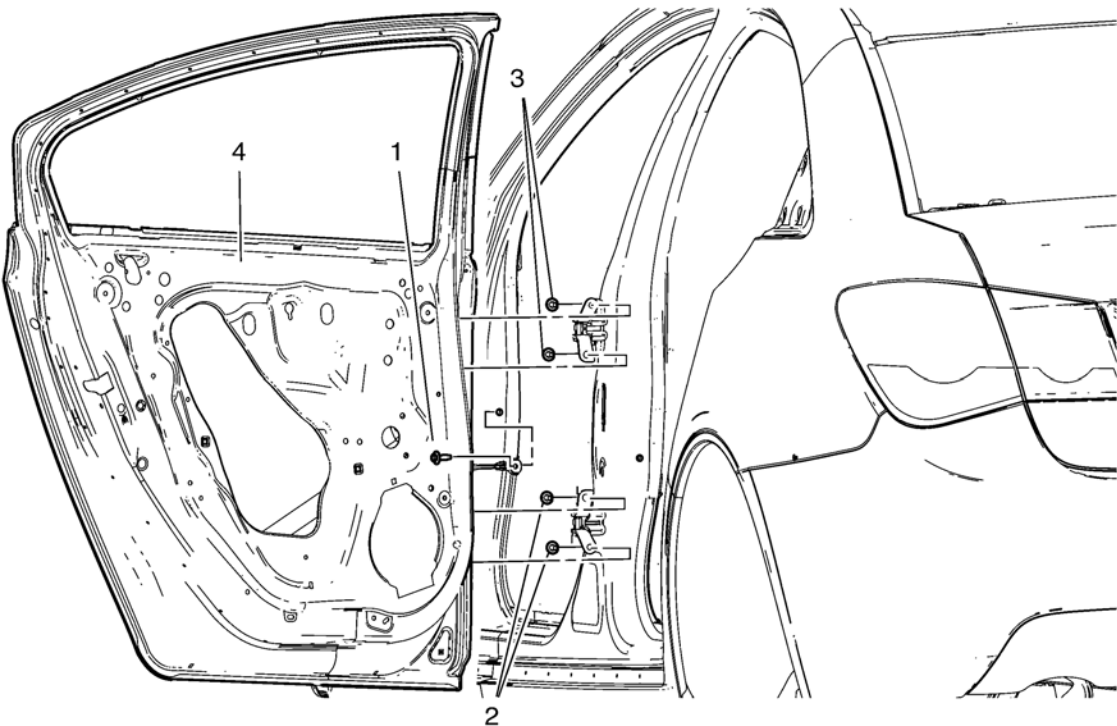

Callout	Component Name
<b>Preliminary Procedure</b>  Remove the rear side door trim panel. Refer to <a href="#">Rear Side Door Trim Replacement</a> .	
1	<div>Rear Side Door Check Link Bolt</div> <div><b>Caution:</b> Refer to <a href="#">Fastener Caution</a> in the Preface section.</div> <div><b>Procedure</b>  1. Remove the water deflector. 2. Disconnect the door electrical connector. 3. Support the door before removing the hinge bolts. 4. With the aid of an assistant, remove the door.</div> <div><b>Tighten</b> 25 N·m (18 lb ft)</div>
2	<div>Rear Side Door Lower Hinge Bolt (Qty: 2)</div> <div><b>Tighten</b> 25 N·m (18 lb ft)</div>
3	<div>Rear Side Door Upper Hinge Bolt (Qty: 2)</div> <div><b>Tighten</b> 25 N·m (18 lb ft)</div>
4	<div>Rear Side Door</div> <div><b>Procedure</b>  1. Transfer all of the internal components. 2. Adjust the rear side door as needed. Refer to <a href="#">Rear Side Door Adjustment</a>.</div>