

# Strut Assembly Replacement


## Special Tools

CH 49375 Wrench


For equivalent regional tools, refer to [Special Tools](#).

## Removal Procedure


1. Raise and the vehicle. Refer to [Lifting and Jacking the Vehicle](#).
2. Remove the tire and wheel assembly. Refer to [Tire and Wheel Removal and Installation](#).

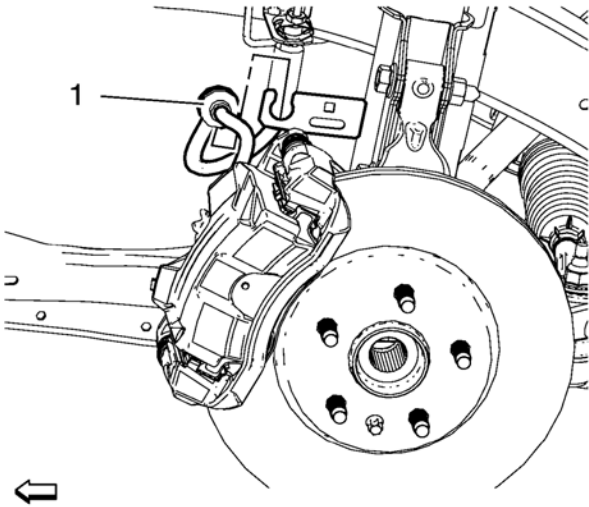

3. Separate the brake hose (1) from the shock absorber.

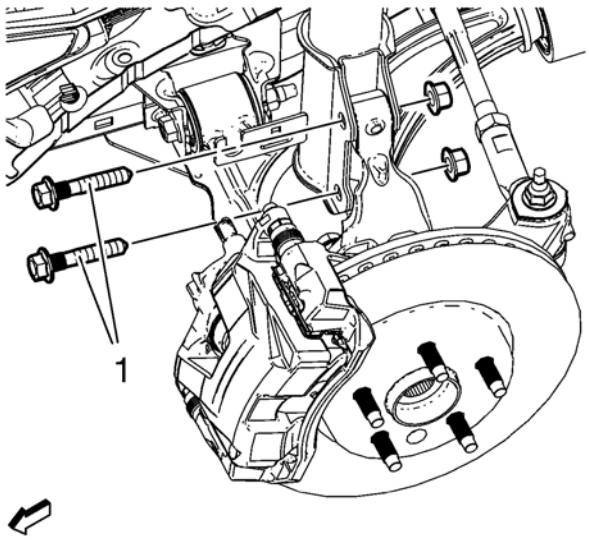

4. Remove the steering knuckle nuts and bolts (1).

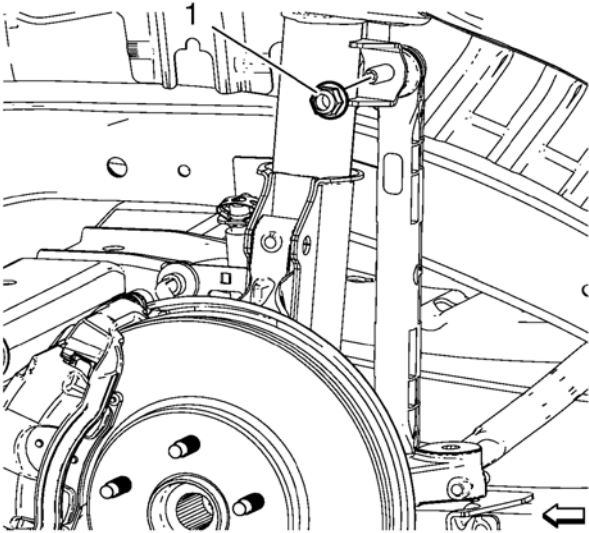

5. Remove the stabilizer shaft link nut (1) from the front strut.
6. Lower the vehicle.
7. Open the hood.