


## Front Side Door Outside Handle Replacement

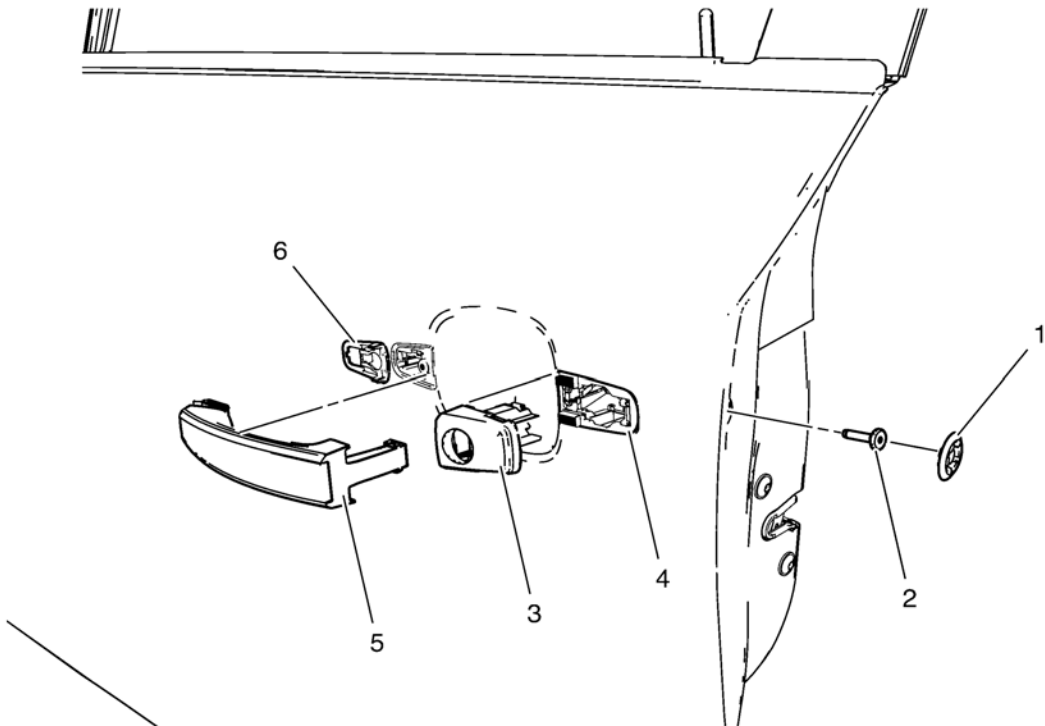

Callout	Component Name
1	<div>Bolt Access Plug</div> <div><b>Procedure</b></div> <div>Use a plastic flat-bladed tool to remove.</div>
2	<div>Front Side Door Outside Handle Bolt</div> <div><b>Caution:</b> Refer to <a href="#">Fastener Caution</a> in the Preface section.</div> <div><b>Tighten</b></div> <div>9 N·m (80 lb in)</div>
3	<div>Front Door Outside Handle Cap</div>
4	<div>Front Door Outside Handle Cap Gasket</div>
5	<div>Front Door Outside Handle</div> <div><b>Procedure</b></div> <div>Pull the outside handle rearward to release it from the inside handle housing.</div>
6	<div>Front Door Outside Handle Gasket</div> <div><b>Procedure</b></div> <div>Inspect the lock, lock cylinder and handle adjustments. Refer to <a href="#">Front Side Door Outside Handle Rod Adjustment</a>.</div>