


Front Fender Replacement

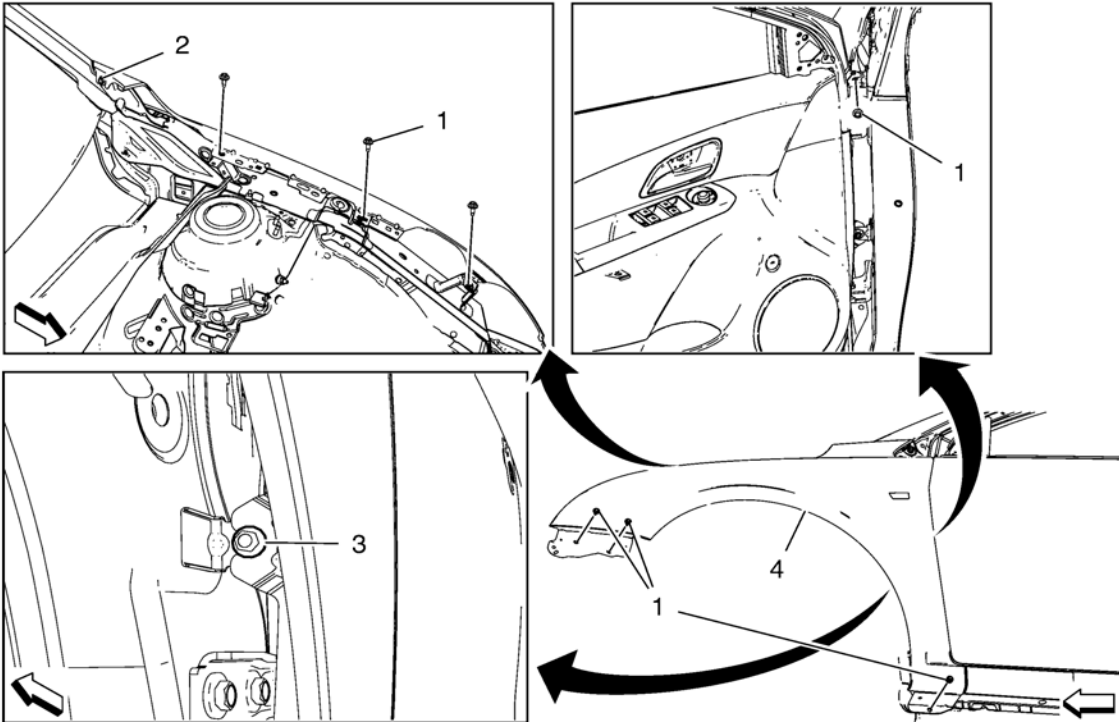

Callout	Component Name
<p>Preliminary Procedure</p> <p>1. Remove the front bumper fascia. Refer to Front Bumper Fascia Replacement</p> <p>2. Remove front bumper fascia guide. Refer to Front Bumper Fascia Replacement</p> <p>3. Remove the wheelhouse liner. Refer to Front Wheelhouse Liner Replacement</p> <p>4. Remove the headlamp. Refer to Headlamp Replacement</p> <p>5. Remove the air inlet grille panel. Refer to Air Inlet Grille Panel Replacement</p> <p>6. Remove the front fender shipping cover. Refer to Front Fender Shipping Cover Replacement</p> <p>7. Remove the front fender insulator. Refer to Front Fender Insulator Replacement</p>	
1	Front Fender Bolt (Qty: 7) Caution: Refer to Fastener Caution in the Preface section. Tighten 8 N·m (70 lb in)
2	Front Fender Bolt Tighten 8 N·m (70 lb in)
3	Front Fender Bolt Tip Simply loosen the bolt rather than remove. Tighten 8 N·m(70 lb in)
4	Front Fender