


Front Bumper Energy Absorber Bracket Replacement

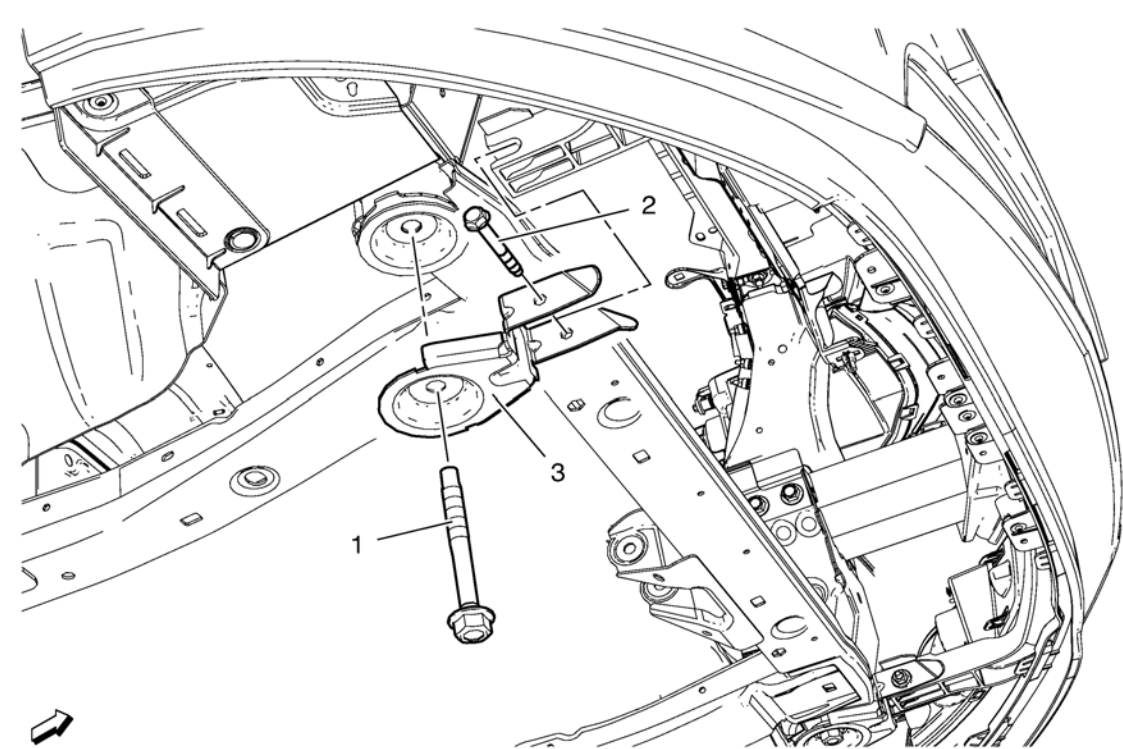

Callout	Component Name
<b>Preliminary Procedure</b> Remove the front bumper fascia opening cover. Refer to <a href="#">Front Bumper Fascia Opening Lower Cover Replacement</a>	
1	Drivetrain and Front Suspension Frame Bolt Front <b>Caution:</b> Refer to <a href="#">Fastener Caution</a> in the Preface section. <b>Tighten</b> 160 N·m (119 lb ft) <b>Note:</b> Do NOT reuse the old bolt.
2	Front Bumper Energy Absorber Bracket Bolt <b>Tip</b> For removal only loosen the bolt. <b>Tighten</b> 22 N·m (17 lb ft)
3	Front Bumper Energy Absorber Bracket <b>Note:</b> Secure the drivetrain and front suspension frame with hydraulic jack.