


Front Side Door Lock Replacement

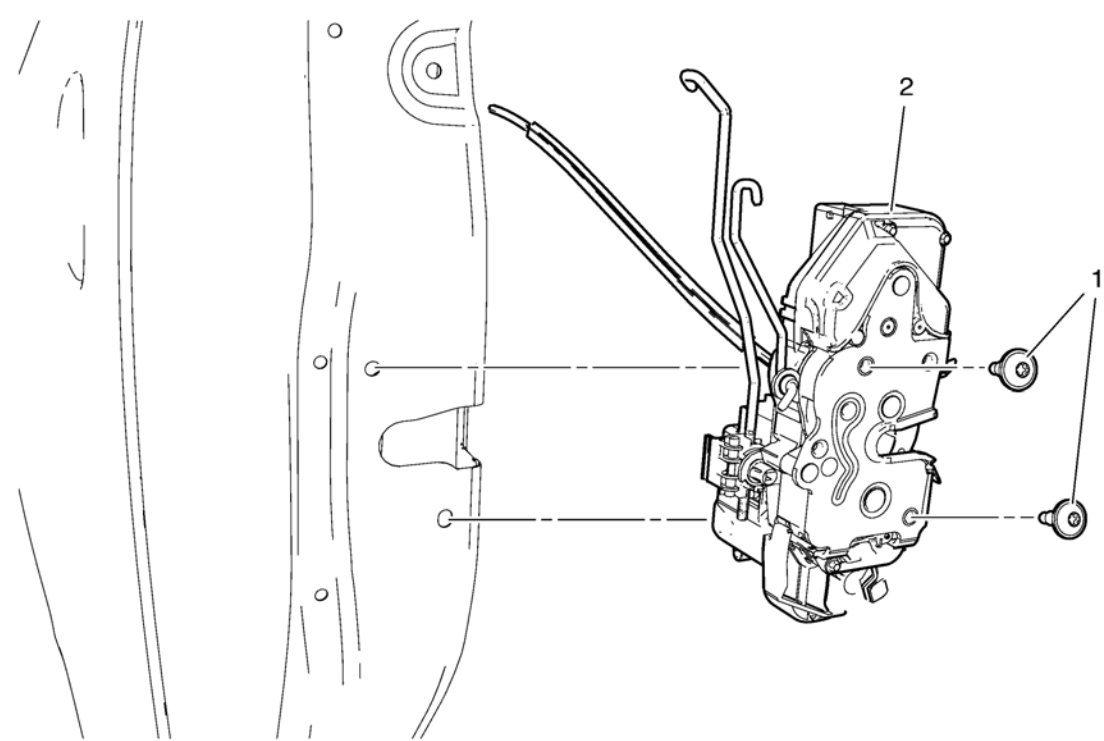

Callout	Component Name
<p>Preliminary Procedure</p> <p>1. Remove the front side door trim. Refer to Front Side Door Trim Replacement.</p> <p>2. Remove the water deflector. Refer to Rear Side Door Water Deflector Replacement.</p>	
1	<p>Front Side Door Lock Screw (Qty: 2)</p> <p>Caution: Refer to Fastener Caution in the Preface section.</p> <p>Tighten 10 N·m (89 lb in)</p>
2	<p>Front Side Door Lock Assembly</p> <p>Procedure</p> <p>1. Release the door lock cable retainers from the door.</p> <p>2. Disconnect the door lock electrical connector.</p> <p>3. Remove the door lock with the handle housing.</p> <p>4. Remove the handle and lock rods from the lock.</p> <p>5. Inspect the lock, lock cylinder and handle adjustments. Refer to Front Side Door Outside Handle Rod Adjustment.</p>