


Rear License Plate Lamp Replacement

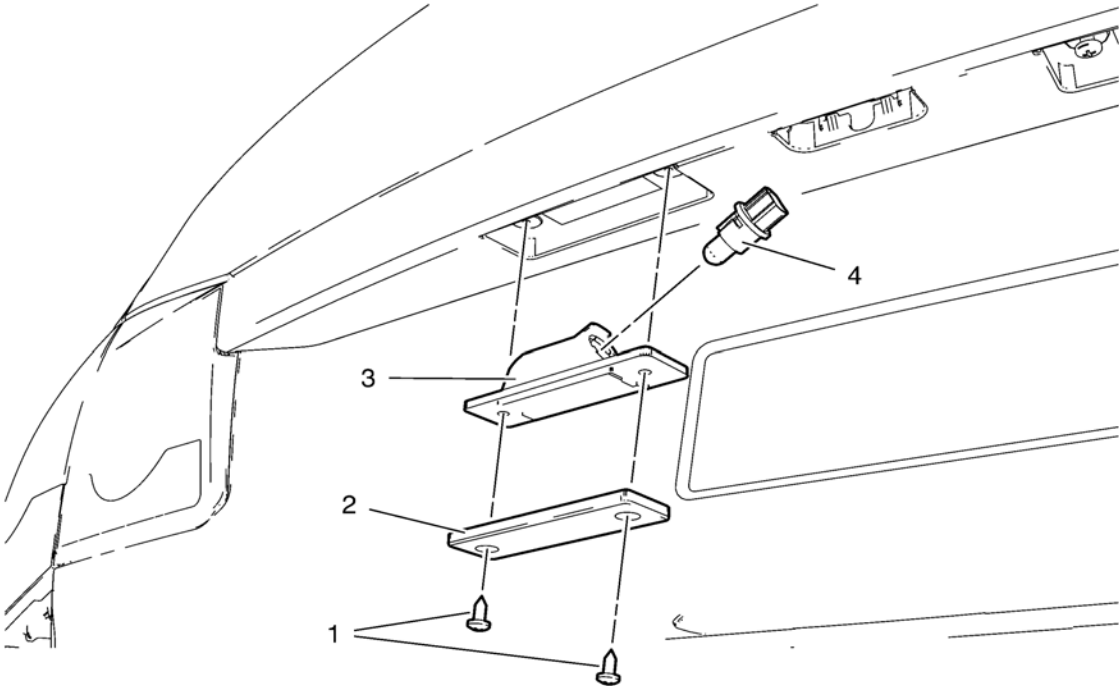

Callout	Component Name
1	Rear License Plate Lamp Screw (Qty: 2) <b>Caution:</b> Refer to <a href="#">Fastener Caution</a> in the Preface section. <b>Tighten</b> 3 N·m (27 lb in)
2	Rear License Plate Lamp <b>Tip</b> Rotate the left corner of the lamp assembly upward and pull the right side down out from the rear bumper fascia opening.
3	Rear License Plate Lamp Socket <b>Tip</b> Rotate the lamp socket counterclockwise and remove.
4	Rear License Plate Lamp Bulb <b>Tip</b> Service the bulb, as needed.