


Front Side Door Window Replacement

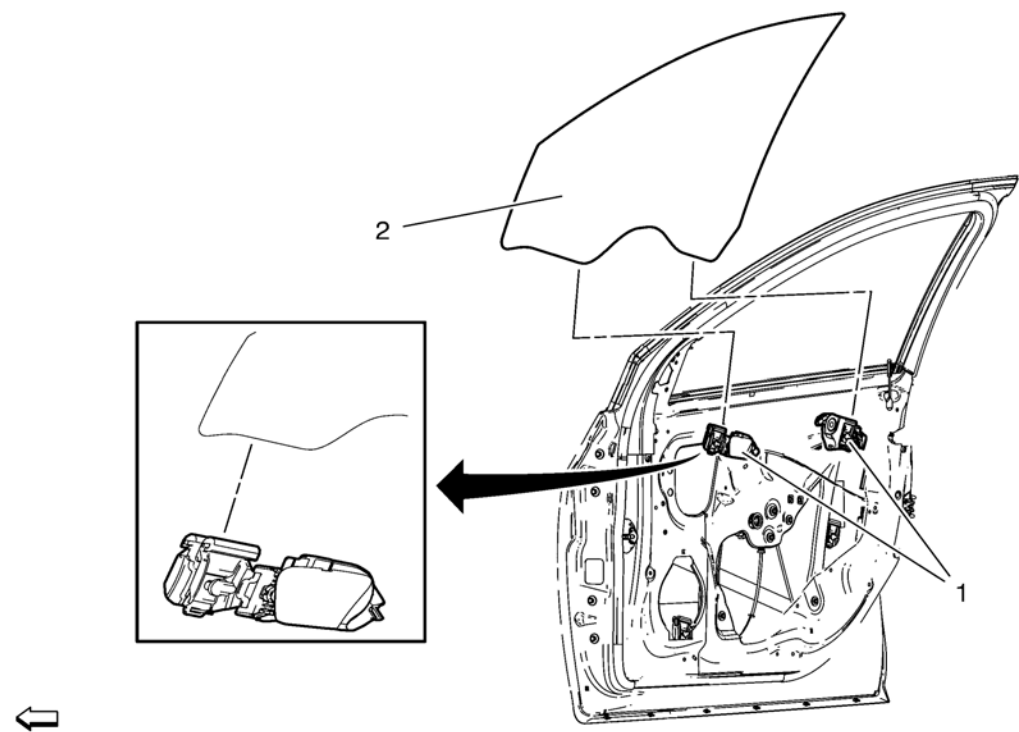

Callout	Component Name
<b>Preliminary Procedure</b>  1. Position the window approximately half way down in the door. 2. Remove the water deflector. Refer to <a href="#">Front Side Door Water Deflector Replacement</a> . 3. Remove the outer sealing strip. Refer to <a href="#">Front Side Door Window Outer Sealing Strip Replacement</a> .	
1	Front Side Door Window Regulator Sash Nut (Qty: 2)  <b>Caution:</b> Refer to <a href="#">Fastener Caution</a> in the Preface section.  <b>Tighten</b> 9 N·m (80 lb in)
2	Front Side Door Window  <b>Procedure</b>  1. Loosen the window regulator sash nuts, pull upward to release the window from the sash. 2. Rotate the front door window as necessary to remove it from the door.