



- 4. Remove inner seat frame cover (1).
- 5. Remove the wire harness, if equipped.

Installation Procedure

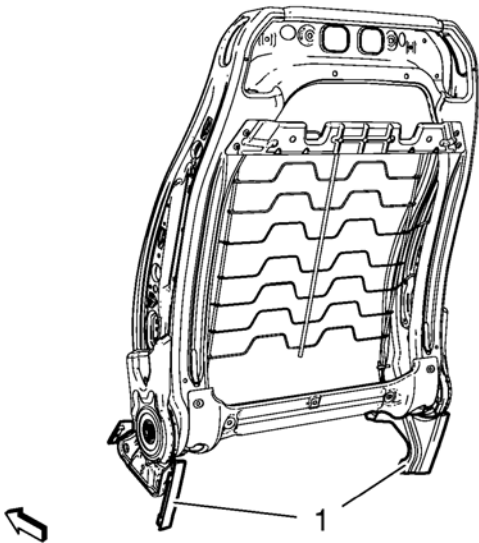

- 1. Install the wire harness, if equipped.
- 2. Install inner seat frame cover (1).

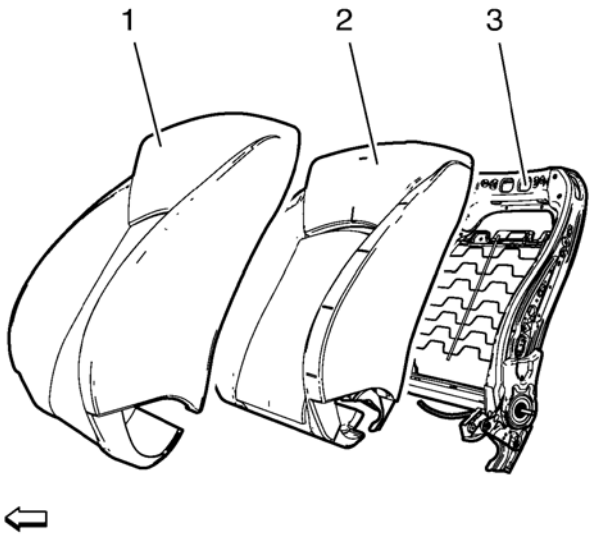

- 3. Install front seat back cushion cover (1) and pad (2) to frame (3). Refer to [Driver or Passenger Seat Back Cushion Cover and Pad Replacement](#)

